cBRAIN

F2 Desktop

Settings and setup

Version 6.1

6.1.0.39807

© Copyright 2018 cBrain

Table of Contents

Welcome to cBrain F2 4

Reading instructions 4

Add-on modules for F2 5

Other documentation 5

Settings and setup 6

Setup of personal user settings 6

The "General" tab 6

The "Main window" tab 10

The "Cases" tab 12

The "Records" tab 13

The "Record view" tab 18

The "Documents" tab 19

The "Chat" tab 20

The "User" tab 21

The "Task guides" tab (add-on module) 24

The "Out of office" tab 25

The "On behalf of me" tab 27

User settings 29

User images 31

Add, change or remove an image 31

Setup of the views in F2 34

Signatures 36

Create a new signature 36

Insert signature 37

Edit existing signatures 38

Language 40

Templates 41

The "Templates" dialogue 42
Adding a new document template 44
Approval templates (add-on module) 45
Distribution lists 47
The "Distribution lists" window 47
Create a distribution list 49
Private distribution lists 51
Edit and delete distribution lists 51
Setting up the results list (column selection, grouping and sorting) 53
Columns – Selecting metadata fields in the result list 54
List of Figures 56

Welcome to cBrain F2

cBrain F2 represents a new generation of Case Management System products and is centred around a fully integrated e-Government model. The model is based on case process support implemented via the actions and tasks performed by a case manager. This model is therefore called "action-oriented case management".

F2 is designed to accommodate the case manager's need for a well-arranged and flexible tool that focuses on the user and in which the need for registration is supported automatically as a by-product of the case manager's work.

Reading instructions

This document is part of the manual for the F2 Desktop client (hereafter F2) and has been prepared as a guide to help you understand the functions and flows of F2. Each section can be read independently.

The F2 Desktop client manual has been divided into seven submanuals that consist of:

1. The main window
2. Search functions
3. Working with records, cases and documents in the main window
4. Settings and setup
5. Records and communication
6. Working with cases
7. Management and organisation

The submanual that you are currently reading is marked in blue. Reading the first submanual, "The main window", is recommended to gain a better understanding of submanuals 2-7.

The document uses an F2 version in which all add-on modules are enabled. Depending on how many add-on modules each organisation has included in its F2 solution, users may notice differences between their F2 and the one discussed in this manual.

In this document the commands, i.e. the buttons on which to click, are highlighted in **bold** while references to boxes or lists in F2 are in "quotation marks".

If this document contains references to other documentation in which further information on a specific functionality may be found, the name of the relevant document or section is in *italics*.

The document includes several screenshots to help demonstrate the described functionality. Screenshots with lines and accompanying text indicate where to click in F2, while screenshots with blue squares designate areas with several functionalities.

All screenshots are taken in F2's recommended resolution. Though the functionalities are the same, users with a lower resolution might find that some icons look different than the ones in this document.

Add-on modules for F2

In addition to the subjects described in this document, F2 offers support for a number of processes and functions in the form of add-on modules. Please contact cBrain for further information.

Other documentation

Documentation relating to F2 as well as a wide range of technical subjects also exists.

Below is a list with a few examples:

- F2 Desktop – Administrator manual
- F2 Desktop – Installation manual
- F2 Desktop – Operations manual.

We hope you enjoy using F2.

Settings and setup

It is possible to adjust F2 according to preference in regard to both functionality and layout. For example, it is possible to regulate how to:

- Display the preview of records, cases, documents and emails in the main window.
- Display the access level that is given to users who are added as supplementary case managers, etc.

In the following section the settings and setup possibilities will be presented with the intention of providing the user with an understanding of the possibilities that F2 offers and how to adjust the settings.

The "Settings" tab in the main window is used to adjust and set up F2. Each user can choose from a number of options concerning F2's behaviour as well as change the appearance of the main window.

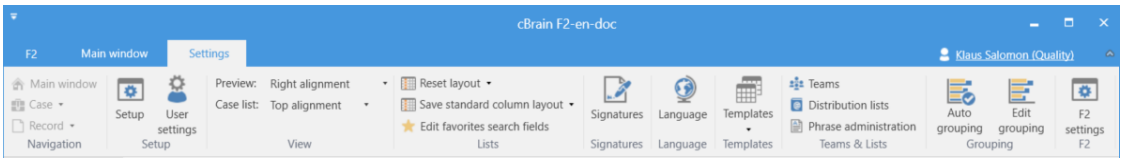

Figure 1: The "Settings" tab

The individual areas under "Settings" will be examined in the following pages.

Setup of personal user settings

The different tabs of the "Setup" dialogue will be discussed in the following sections. To open the "Setup" dialogue, click on **Setup** in the "Settings" tab in the main window.

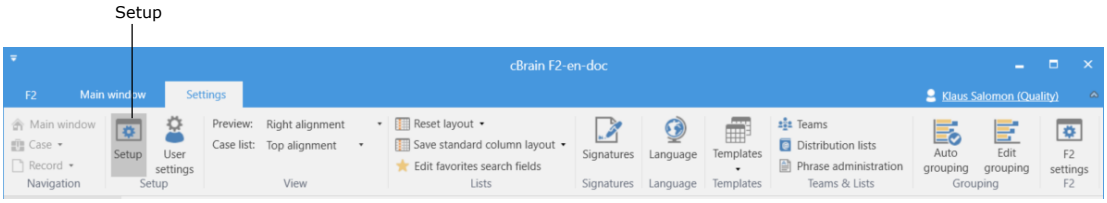

Figure 2: "Setup" under "Settings"

The "General" tab

To change the general settings of F2 click on **General** in the "Setup" dialogue as shown below.

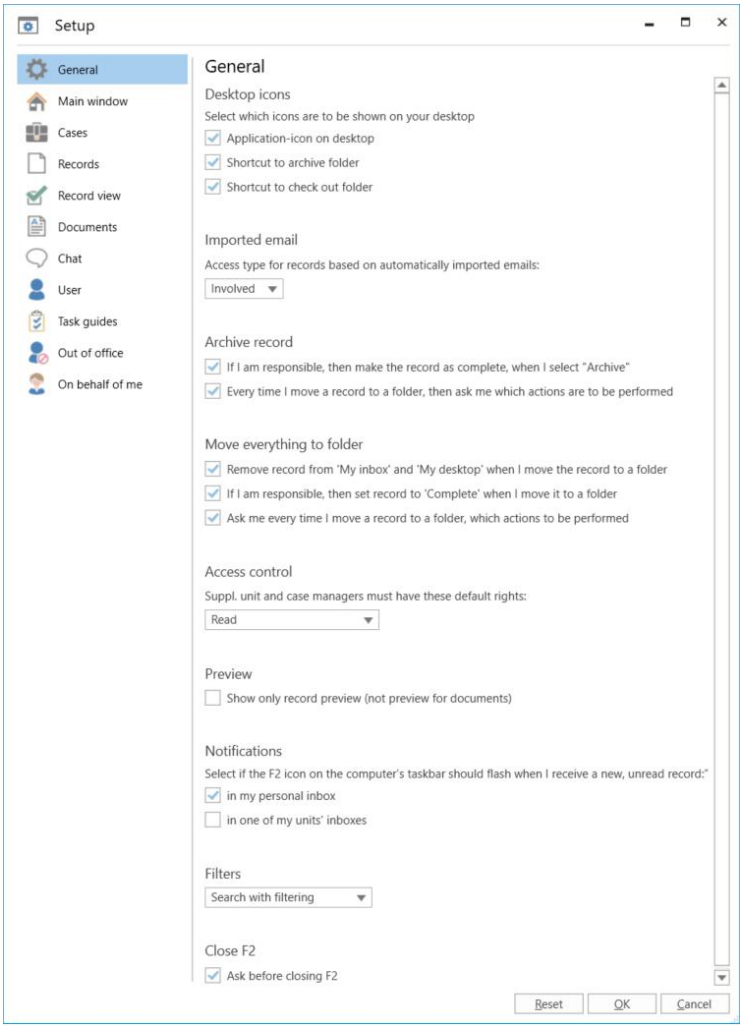

Figure 3: Setup – "General"

The setup possibilities are described below.

Function	Purpose
Under "Desktop icons", select which icons and folders to display on the computer's desktop:	
"Desktop icons"	The following icons can be added to or removed from the computer's desktop: • The F2 program icon • A shortcut to the "Archive folder" (i.e. the folder for importing files to F2). • Shortcut to the "Check out folder" (i.e. the folder in which the user can place documents to work on offline. The documents can be checked back into F2). For more information see *F2 Desktop – Records and communication.*

Function	Purpose
Under "Imported email", select which access type to give to imported emails:	
"Access type for records based on automatically imported emails" 	Here it is possible to control which access level F2 should give imported emails. Choose between the following options: • "Involved" • "Unit" • "All". **Note**: It can be an advantage to set the access level to "Unit". This way, if a user is not present, the unit colleagues are still able to search for emails intended for the unavailable user.
Under "Archive record", select which actions to perform when a record is archived:	
"If I am responsible, then complete the record when I select "Archive""	If this box is ticked, F2 will automatically set the record as complete when archived if the user is responsible for the record.
"Every time I choose "Archive", ask me which actions are to be performed"	If this box is ticked, the dialogue below will open when the user clicks on **Archive**. 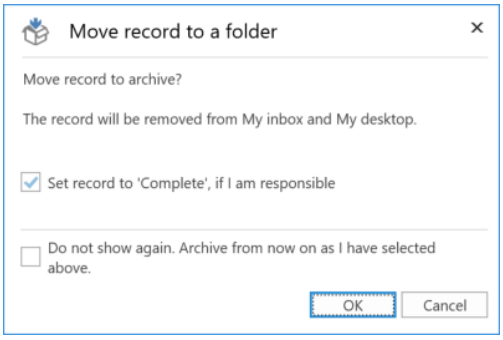 **Figure 4: The dialogue "Archive and close"**
Under "Move everything to folder", select which actions to perform when a record is moved to a folder.	
"Remove record from 'My Inbox' and 'My Desktop' when I move the record to a folder"	If this box is ticked, F2 will automatically remove the record from "My Inbox" and "My Desktop" when the record is moved to a folder.
"If I am responsible, then set record to 'Complete' when I move it to a folder"	If this box is ticked, F2 will automatically set the record to complete when moved to a folder if the user is responsible for the record.

Function	Purpose
"Ask me every time I move a record to a folder, which actions are to be performed"	If this box is ticked, the dialogue shown below appears every time a user moves a record to a folder. 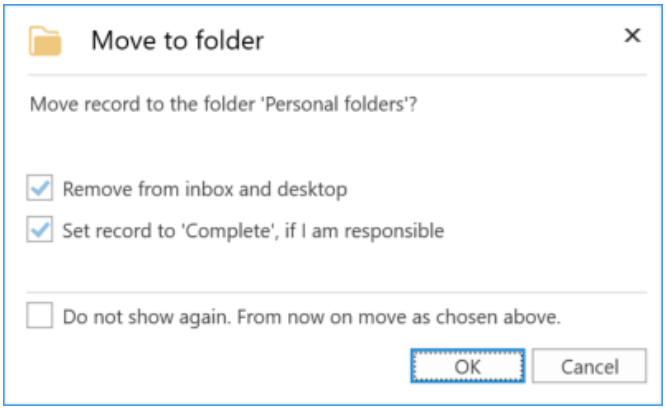 **Figure 5: The "Move to folder" dialogue**
Under "Access control", select which access level to give to a unit or user when added as a supplementary unit or case manager.	
"Suppl. unit and case managers must have these default rights":  	There are three different access levels to choose between: 1) "Read": The supplementary unit and/or case manager only has read access to the record. 2) "Write": The supplementary unit and/or case manager has write access to the record's metadata, the record itself and any attached documents. 3) "Write access to documents": The supplementary unit and/or case manager has write access to any attached documents on the record, but NOT to the record itself or the record's metadata. The standard access level for supplementary units and case managers is "Write". The standard value applies to all new users and/or when a user setting is reset.
Under "Preview", select settings for the preview.	
"Show only record preview (not preview for documents)"	If this box is ticked, the user must click on **Show preview** to display a preview of the record's attached documents. If the box is not ticked, F2 will automatically show a preview of the record's attached documents.

Function	Purpose
Under "Notifications", select if the F2 icon on the computer's taskbar should flash when there are new records in an inbox.	
"In my personal inbox"	If this box is ticked, the F2 icon will flash when the user receives a new record in his/her personal inbox.
"In one of my units' inboxes"	If this box is ticked, the F2 icon will flash when the user receives a new record in one of his/her unit inboxes.
Under "Filters", choose if the free-text search field should be used to filter results in an already existing search.	
"Filters"  	Select if the free-text search field can be used for filtering. Choose between: • "Search with filtering": The free-text search field can be used to filter results in existing searches. • "Standard search": The free-text search field cannot be used to filter results. Read more about using filters when performing searches in the submanual *F2 Desktop – Search functions*.
Under "Close F2", choose whether to display a dialogue when F2 closes.	
"Ask before closing F2"	If this box is ticked, the dialogue "Close cBrain F2?" appears before F2 closes. If the box is not ticked, F2 will close without asking the user to confirm. 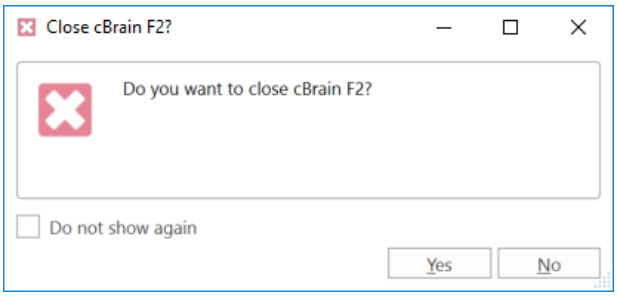

Figure 6: The "Close cBrain F2?" dialogue

The "Main window" tab

It is possible to personalise the standard settings for the main window. Click on **Main window** in the dialogue "Setup" as shown below.

It is also possible to adjust how searches are generally displayed.

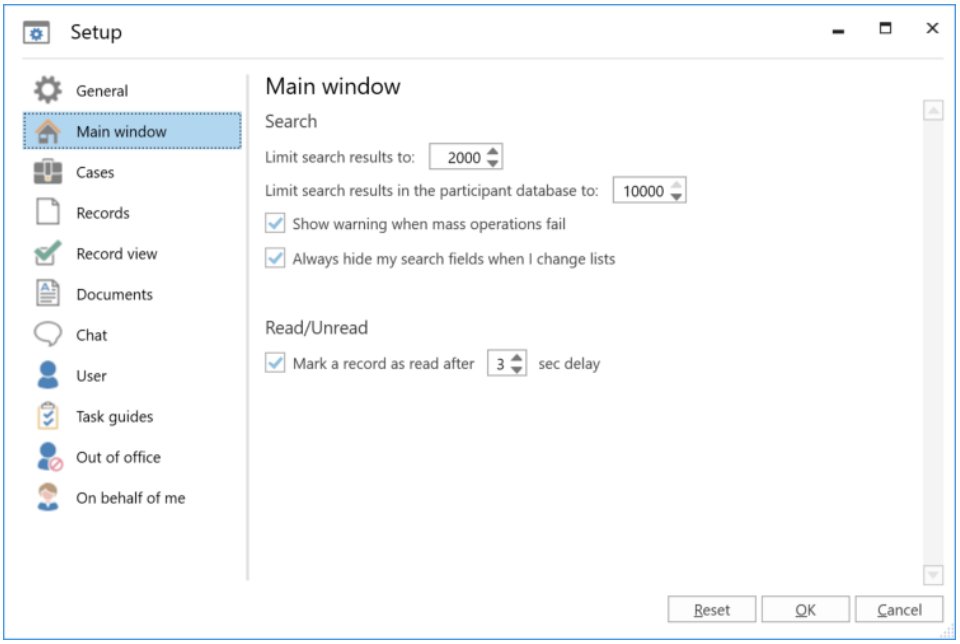

Figure 7: Setup for the "Main window"

The setup possibilities for the main window are described below:

Function	Purpose
"Limit search results to:"	Specify the number of search results that F2 displays in a list when a search is performed. It is recommended to set the number between 200-300. After performing a search, F2 shows the number of results on the blue status line in the bottom left corner. If a user has set the limit at 300 results, F2 will not show more than 300 results. This means that the actual number of results may be greater. **Note**: If the user specifies a large number, the search may take longer to perform.
"Limit search results in the participant database to:"	Specify the number of search results that F2 displays when a search is performed in the participant register. It is recommended to set this number to 1000. After performing a search, F2 shows the number of results on the blue status line in the bottom left corner. If a user has set the limit at 1000 participants, F2 will not show more than 1000 participants. This means that the actual number of participants may be greater.
"Show warning when mass operations fail"	If this box is ticked, a warning will appear if a mass operation fails.

Function	Purpose
"Always hide my search fields when I change list"	F2 remembers if search fields in a given list are displayed or hidden. Tick this box, and F2 will hide the search fields when changing lists.
"Mark a record as read after X sec delay"	Choose whether to mark a record as read when previewed. It is also possible to specify the amount a time a user must preview a record before it is marked as read. If the box is unticked, the record will be marked as unread until opened or marked as read via the context menu.

The "Cases" tab

Click on **Cases** in the "Setup" dialogue to define which security groups should be added to a newly created case. It is also possible to define which fields should be displayed by default when a case is opened.

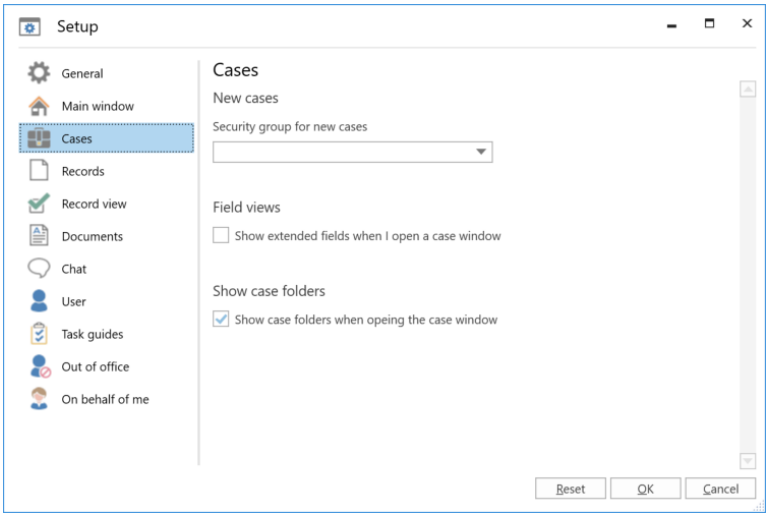

Figure 8: Setup for "Cases"

The setup possibilities for the case window are described below:

Function	Purpose
"Security group for new cases"	Specify if new cases should be attached to a specific security group. If this field is not filled in, new cases will not be given a security group when created. Security groups function as access groups with the purpose of protecting data in F2. An F2 administrator assigns users to security groups. Read more about security groups in *F2 Desktop – Administrator manual*.

Function	Purpose
"Show extended fields when I open a case window"	Select whether a case should open with collapsed or expanded metadata fields.
"Show case folders when opening the case window"	Select whether any case folders should be displayed when opening a case window. If this box is unticked, case folders will be hidden when opening a case window.

The "Records" tab

It is possible to personalise the record window's settings. Click on **Records** in the "Setup" dialogue as shown below.

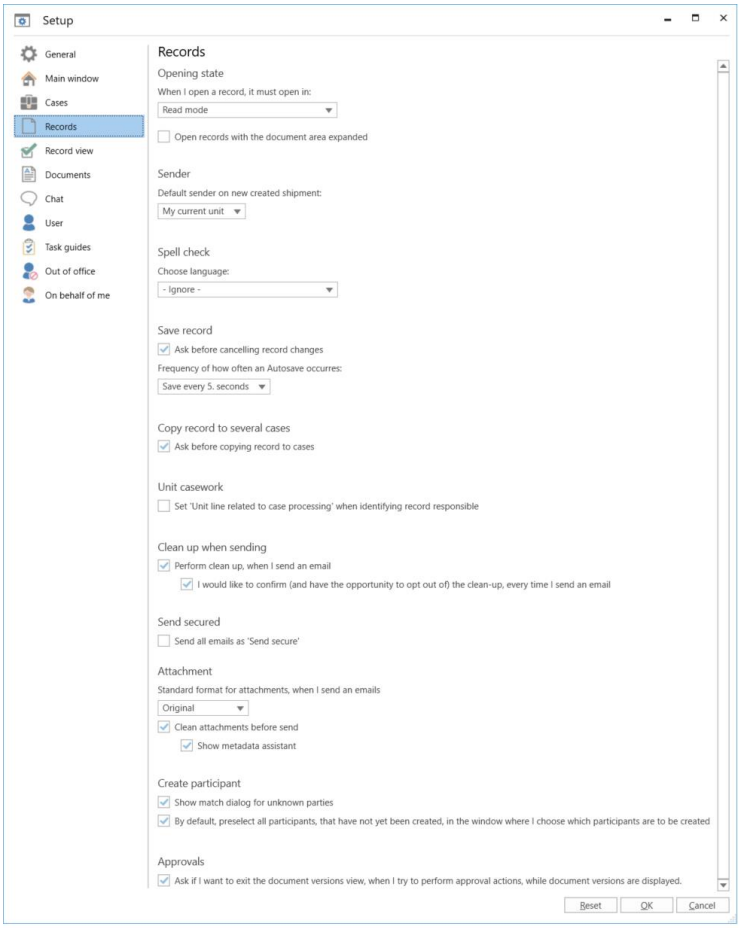

Figure 9: Setup for "Records"

The setup options for the record window are described below:

Function	Purpose
"When I open a record, it must open in:" 	Choose in which state to open a record: • "Read mode" means the user has to click on **Edit** in order to write in the record. • "Only documents must be in edit mode" opens the record in read mode, but it is possible to edit the attached documents. • "Edit mode" lets the user edit metadata, attached documents and the record itself without clicking on Edit.
"Open records with document area expanded"	Opens the record with the document area expanded. If this box is unticked, the document area will be collapsed.
"Default sender on new created shipment"	Select if the user or the user's current unit should be the standard sender for new deliveries.  **Note**: It is always possible to select a different sender in the "From" field on an email regardless of which standard setting has been chosen.
"Choose language"	Select or deselect the spell-check function for the desired language.  **Figure 10: Select language**
"Ask before cancelling record changes"	Choose whether F2 should ask for confirmation when the user clicks the "Cancel" button in the record window. 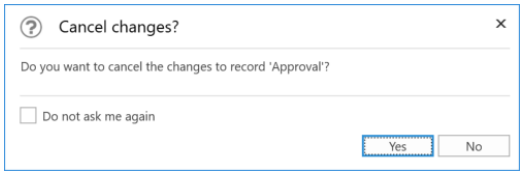 **Figure 11: The "Cancel changes?" dialogue**

Function	Purpose
"Frequency of how often auto save occurs"	Choose between the following auto save intervals:  **Figure 12: Select the auto save interval**
"Ask before copying record to cases"	Select if F2 should ask the user if the record should copy the chosen record to more than one case. 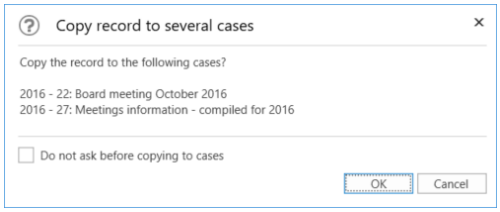 **Figure 13: The "Copy record to several cases" dialogue** Read more about copying records to cases in *F2 Desktop – Records and communication*.
"Set 'Unit line related to case processing' when identifying record responsible"	If this box is ticked, the record field "Unit line related to case processing" will be ticked by default when the record is allocated responsibility.
"Clean up when sending" lets the user adjust the automatic clean-up:	
"Perform clean-up, when I send an email"	If this box is ticked, F2 helps the user clean up by automatically completing and moving the record to the "Archive" when it is sent.
"I would like to confirm (and have the opportunity to opt out of) the clean-up, every time I send an email"	If this box is ticked, F2 asks the user to confirm before performing the clean-up.

Function	Purpose
"Send all emails as 'Send secure'"	When ticked, F2 will send all emails using the "Send secure" function (add-on module). It is possible for the user to deselect this option for each individual record. 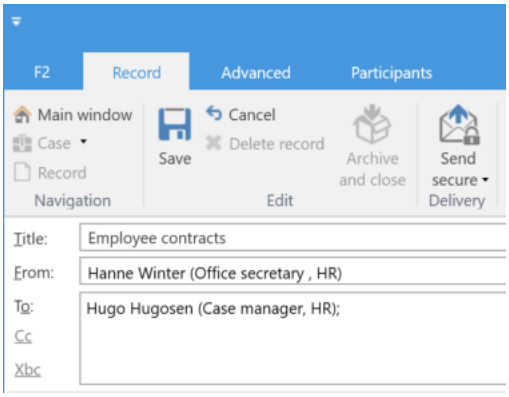 **Figure 14: "Send secure" as a default setting** **Note**: The Send button in the record window changes according to the user's default setting. If the user has ticked the "Send secure" box, the "Send secure" will be shown as the default sending option.
It is possible to choose the standard format for attachments to outgoing records. It is also possible to select whether the attachments should be cleaned of internal metadata (add-on module).	
"Standard format for attachments, when I send an email:"	Choose whether attachments to an outgoing record should have the format "PDF" or "Original".
"Clean attachments before send"	Choose whether record attachments should be with or without metadata.

Function	Purpose
"Show metadata assistant" (add-on module)	F2 shows displays the format of attachments to a record. Before sending an email to an external participant, F2 will open the dialogue below in which the user can choose how to send the attachments. 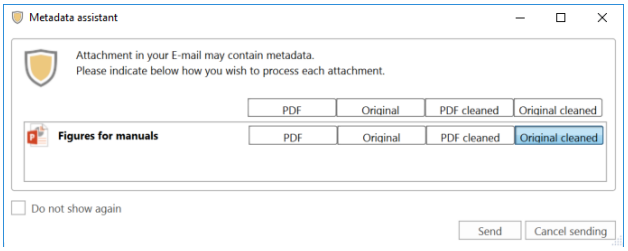 **Figure 15: The "Metadata assistant" dialogue**
Create participant	
"Show match dialogue for unknown participants"	If an external email is sent or received and F2 does not recognise the participant, a dialogue will open in which the unknown participant can be saved. 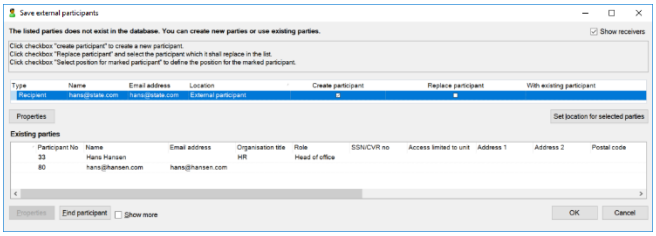 **Figure 16: The "Save external participants" dialogue**
"By default, preselect all participants, that have not yet been created, in the window where I choose which participants are to be created"	Click on **Create participant** in the record window to add an unknown participant to the participant register. 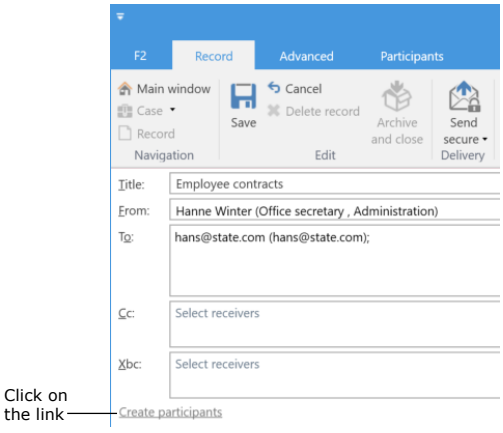 **Figure 17: "Create participants"**

Function	Purpose
"Ask if I want to exit the document versions view, when I try to perform approval actions, while document versions are displayed" (add-on module)	If an attempt to process an approval is done while viewing the document versions in the log, the dialogue shown below will appear. 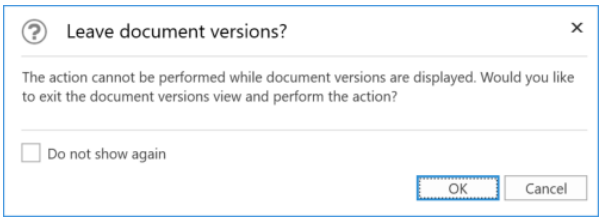 **Figure 18: The "Leave document versions?" dialogue** For additional information see *F2 Approvals – User manual*.

The "Record view" tab

It is possible to personalise how the record window should be displayed when opened. Click on **Record view** in the "Setup" dialogue to access the settings as shown below.

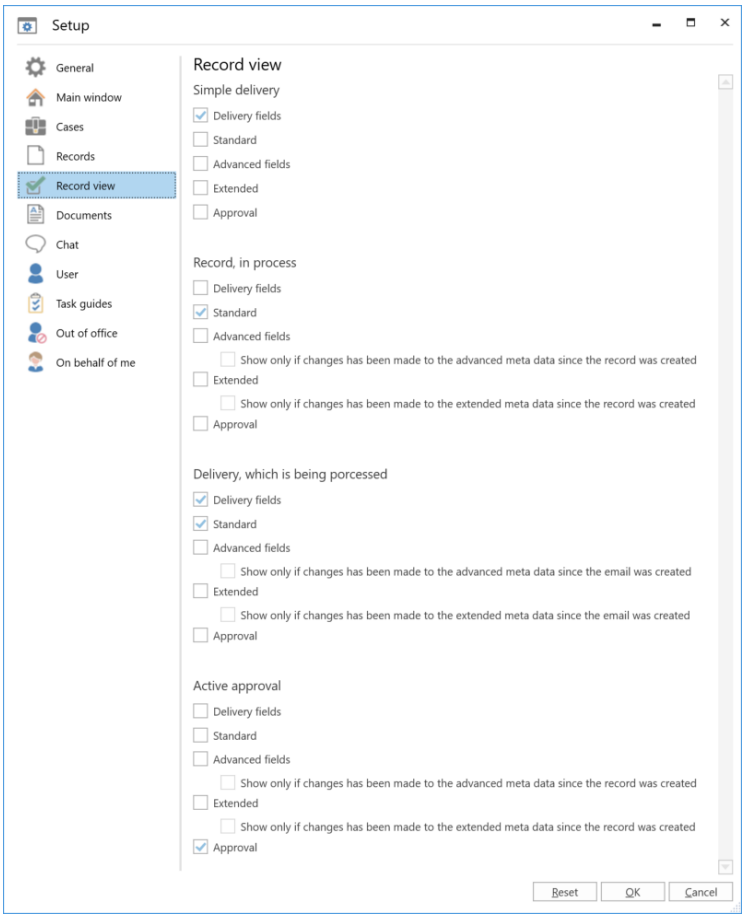

Figure 19: Setup for "Record view"

The viewing options for the record window are described below. For example, it is possible to choose whether a record opens with its metadata fields collapsed or expanded.

Function	Purpose
"Simple delivery"	Select how to display metadata for delivery records.
"Record, in process"	Select how to display metadata for records in process.
"Delivery, which is being processed"	Select how to display metadata for delivery records in process.
"Active approval" (add-on module)	Select how to display metadata for active approvals.

The "Documents" tab

Click on **Documents** in the "Setup" dialogue to determine how F2 opens an attached document on a record not in editing mode. It is also possible to define how F2 should react when a document is opened directly from the main window.

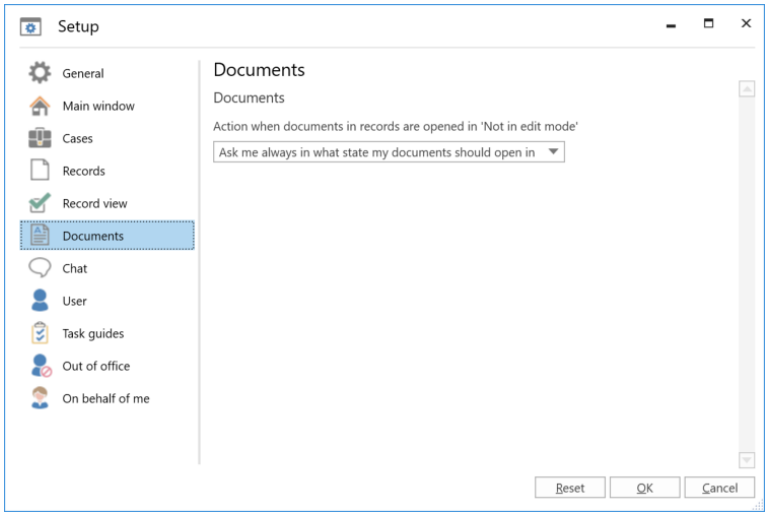

Figure 20: Setup for "Documents"

The setting options for the function "Action when documents in records are opened in 'Not in edit mode'" are described below. It is possible to choose in which state to open attached documents in F2. This is valid for both the record and main windows.

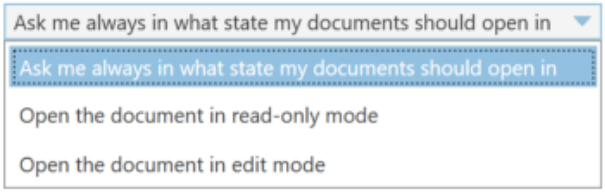

Figure 21: Select the opening state for documents

Function	Purpose
"Ask me always in what state my documents should open in"	The dialog below opens whenever a document is opened from a record that is not in editing mode. The user can choose between the options below. 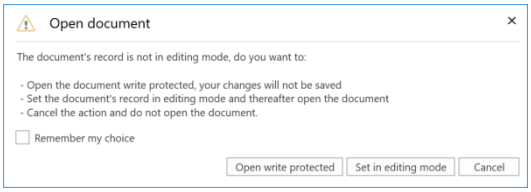 **Figure 22: The "Open document" dialogue**
"Open the document in read-only mode"	The document opens in read-only mode, and changes to the document cannot be saved. This setting is primarily used when a document is to be read but not further processed.
"Open the document in edit mode"	The document opens in edit mode if the user has the right to edit the document, and the user can then start the work immediately. When the document on the record is opened, the document is automatically set in editing mode.

The "Chat" tab

After clicking on **Chat** in the "Setup" dialogue, set the chat display settings.

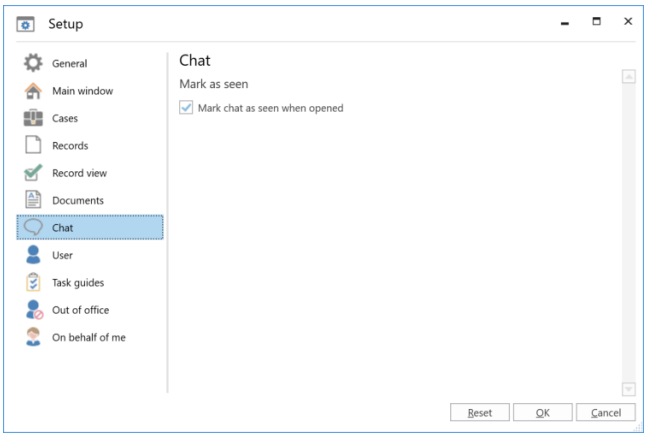

Figure 23: Setup for "Chat"

Below are the setting options for the "Chat" dialog.

Function	Purpose
"Mark as seen"	Tick this box to automatically mark a chat as seen when the chat dialogue is opened.

The “User” tab

After clicking on **User** in the "Setup" dialogue, it is possible to select a default role. If a user has multiple job roles, the user can choose to display the dialogue "Role chooser" at login.

Here visually impaired users can activate F2's accessibility options to operate F2 using a screen reader.

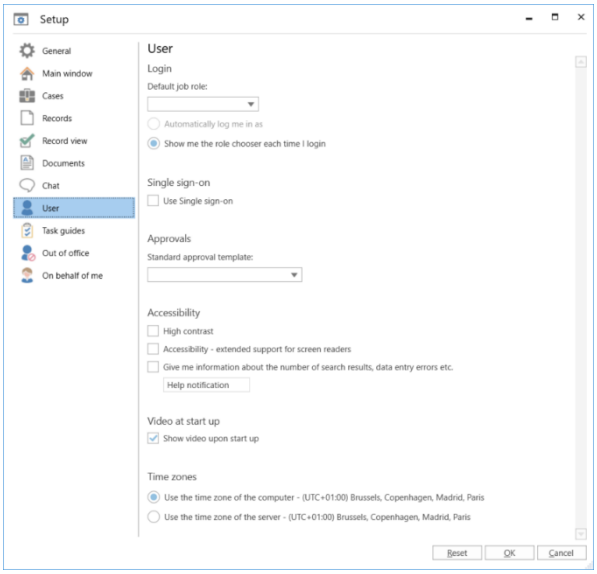

Figure 24: Setup for “User”

Below are the setting options.

Function	Purpose
If a user has multiple roles in F2, the "Login" settings provide a number of options for how F2 will handle these roles.	
“Default job role” 	Select the user’s default role when logging in. Choose among the job roles that the user has already been assigned by an administrator. This role is also used for email import.
“Show me the role chooser each time I login”	If “Show me the role chooser each time I login” is selected, the dialogue “Please choose user role” appears on login.

Function	Purpose
	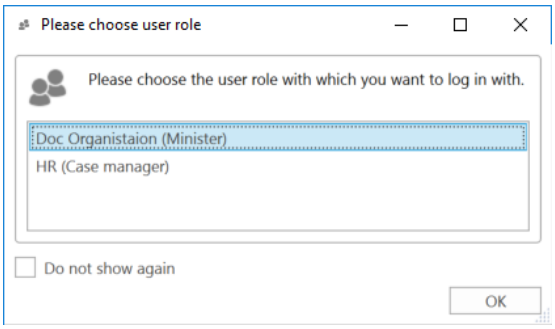 **Figure 25: The "Please choose user role" dialogue** In the dialogue, the user selects the role to be logged in as shown in the example above. If one of the above roles is not selected, the user is automatically logged in with the default job role.
"Use single sign-on"	Select whether to turn off single sign-on, in which case a password must be entered to start F2. **Note**: Even though the "Use single sign-on" box is unticked, it is still possible to select single sign-on when logging in. Single sign-on uses the Windows login to log in to F2. 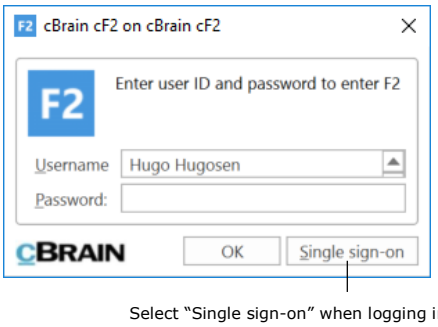 **Figure 26: Login using "Single sign-on"**
"Standard approval template" (add-on module)	Select which approval template to use as a standard when creating a new approval process. 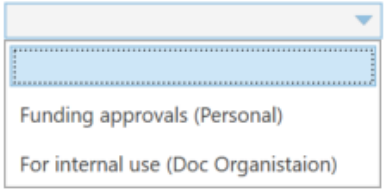 **Figure 27: Select standard approval template**

Function	Purpose
Under "Accessibility", there are a number of options for setting up and adapting the accessibility of F2:	
"High contrast"	Ticking this field makes it possible to replace the normal F2 icons with F2 icons in a higher contrast. That is, there is a greater difference between light and dark in the same icon as shown in the example below. **Figure 28: Example of an icon with high contrast** **Note**: It is possible to display certain icons with a higher contrast. Such additions must be organised with cBrain. F2 must be restarted for the changes to take effect.
"Accessibility – Extended support for screen readers"	Tick the box to enable the use of a screen reader in F2. F2 must be restarted for the changes to take effect.
"Give me information about the number of search results, data entry errors etc."	Choose how F2 notifies the user when performing searches, about warning icons, validation errors such as invalid values when entering an email address, etc. The user can receive the notification either via a help box at the bottom of the main, record and case windows or via a pop-up window. 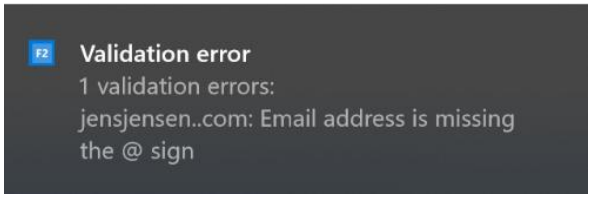 **Figure 29: Help notification**
Under "Video at start up", F2's start-up video can be turned on or off.	
"Show video on start-up"	Tick the box to show the video on start-up.
Under "Time zones", select whether F2 displays time and date using the computer's or the server's time zone.	
"Time zones"	Choose between the F2 client's or the server's time zone:

Function	Purpose
	• "Use the time zone of the computer" • "Use the time zone of the server" The selected time zone is for example displayed for clocking chats. If the user has decided to use the F2 client's time zone he/she will see deadlines in local time e.g. when abroad. The same applies when to dates and times entered in deadlines or searches. F2 users in a different time zone will see the date and time for their own time zone. Dates and times generated on the server will always be displayed using the server's time zone. This applies to e.g. conversion of Word documents into PDF files. **Note**: This is a configuration option and has to be set up in cooperation with cBrain.

The "Task guides" tab (add-on module)

If the F2 add-on module "Task guides" has been purchased, the menu item "Task guides" is displayed. Click on **Task guides** in the "Setup" dialogue to view the setup options.

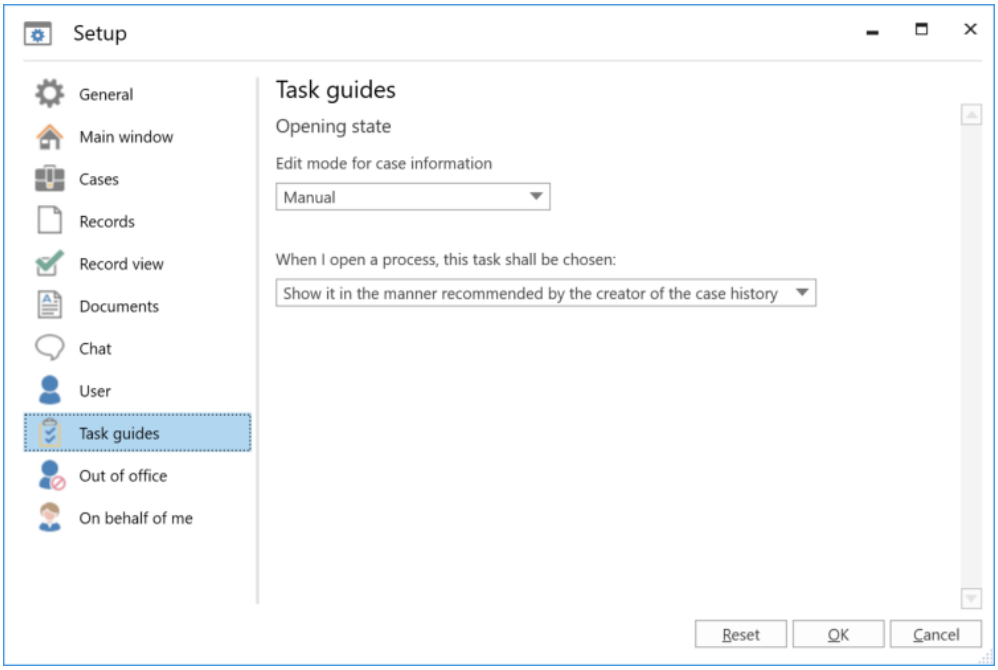

Figure 30: Setup for "Task guides"

The user setting options for task guides are described below.

Function	Purpose
"Edit mode for case information" 	Select the editing mode for case information when the user opens a task guide. Two options exist: • "Manual" • "Automatically, prompt for saving".
"When opening a task guide the following must be selected" 	Select the navigation for a chosen process in the task guide. It is possible to select the starting point of a process when the user opens a task guide. Choose between: • "Show it in the manner recommended by the creator of the case history". • "Do not choose a task". • "Choose the first task". • "Choose the first uncompleted task".

The "Out of office" tab

Click on **Out of office** in the "Setup" dialogue to create an automatic out of office message. The automatic message applies to internal communication in F2. External senders may also receive the auto-reply if the organisation has enable this in the email account's configuration.

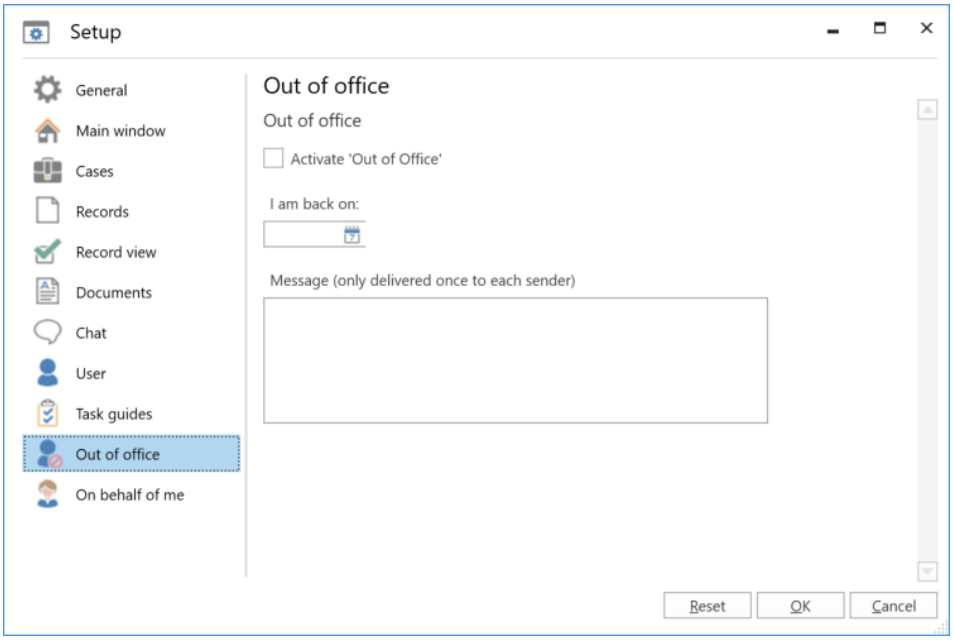

Figure 31: Setup for "Out of office"

The setup options are described below.

Function	Purpose
Set the "I am out of office" auto-reply under "Out of office":	
"Activate 'Out of Office'"	Tick this box to indicate that the user is not present due to vacation, sick leave, etc. When the box is ticked, the "Out of office" feature is activated and sends an auto-reply when the user receives an email in F2. **Note**: The box has to be manually unticked once the user is present again. As displayed in the figure below, the user image will display the "out of office" icon. Hovering the mouse over the user on the participant list in chats/notes shows that the user is out of office and when he/she will be return. 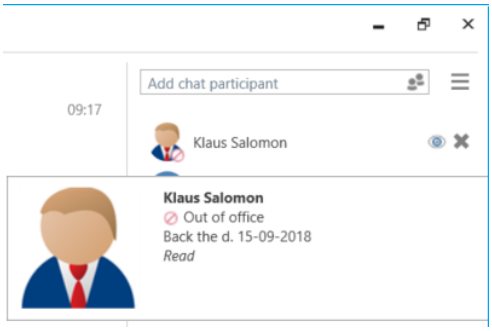 **Figure 32: Out of office in chat**
"I am back on:"	Specify the date that the user will be return.
"Message (only delivered once to each sender)"	Enter an auto-response which will be sent to users when trying to the user who is out of office. **Note**: The automatic message is sent to each sender only once, even if the user receives multiple emails from the same sender.

Note: It is possible to save the "Out of office" settings, while logged in on behalf of another user. Other user settings are not saved when logging out or changing to another "on behalf of" user.

The "On behalf of me" tab

Click on **On behalf of me** to assign privileges to another user, so he/she can act on behalf of the unavailable user.

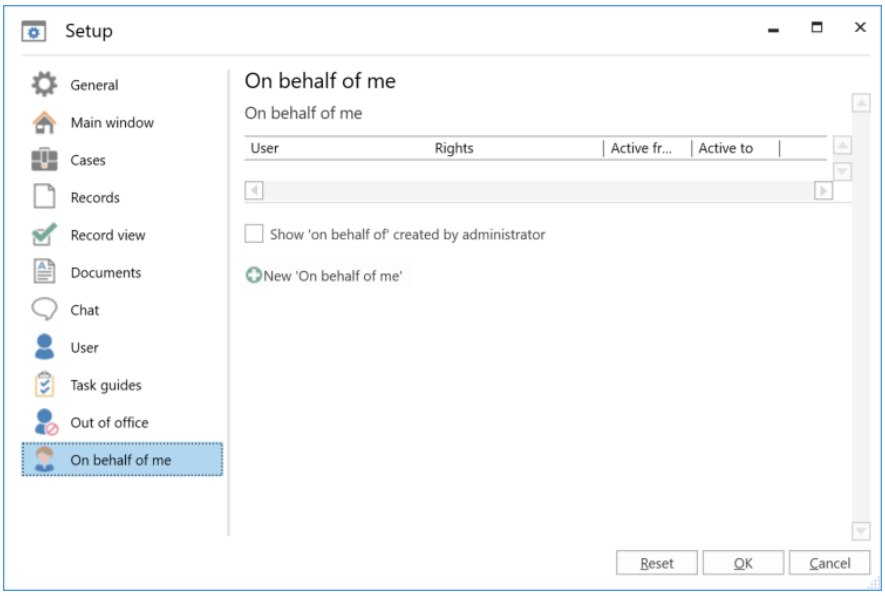

Figure 33: Setup for "On behalf of me"

The setting options for "on behalf of" privileges granted to another user (colleague) are described below. This function allows a colleague to act on behalf of the user.

Function	Purpose
"On behalf of me"	If "on behalf of" privileges have been granted another user, it is possible to see the following in the overview: • To whom the privileges have been given. • The area covered by the privileges. • The duration of the privileges. The privileges can be withdrawn/deleted by clicking the ✖ next to the user with the privileges. 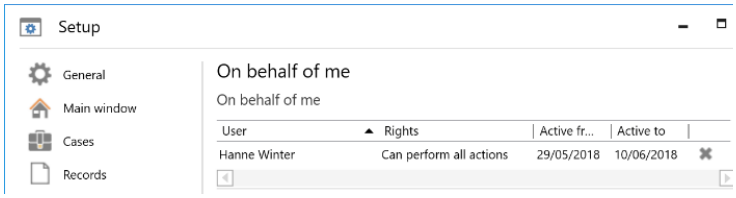 **Figure 34: The "On behalf of" overview**
"Show 'on behalf of' created by administrator"	Tick this box to view the "on behalf of" privileges that have been granted by an F2 administrator.
"New 'On behalf of me'"	This opens the following dialogue:

Function	Purpose
New 'On behalf of me'	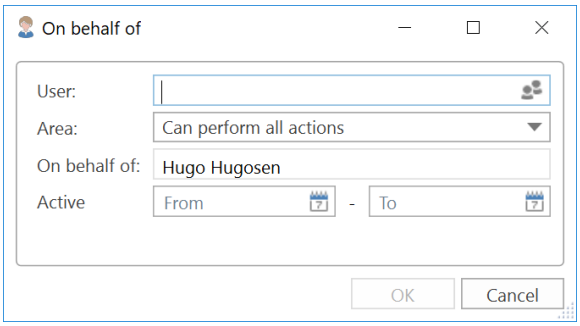 **Figure 35: Assign "on behalf of" privileges** Specify the following: • In the "User" field, enter the name of the colleague who should be assigned "on behalf of" privileges. • In the "Area" field, enter which privileges the user should be given. It is possible to choose between "Can perform all actions" and "Can handle approvals" (add-on module). • In the "On behalf of" field, enter the user on whose behalf the colleague is acting. • In the "Active" field, specify the time for the "on behalf of" privileges. If no dates are entered, the "on behalf of" privileges will be active for an unlimited time. • Click on **OK** to complete the act of granting "on behalf of" privileges.

Note: It is possible to save the "Out of office" settings, while logged in on behalf of another user. Other user settings are not saved when logging out or changing to another "on behalf of" user.

User settings

A user can retrieve a default user setting or a partial user or column setting. These defaults contain setups from a specific user or column setting that state which columns are shown in the result list, the order of the columns, the column width, how the columns are sorted and the grouping of columns if applicable.

The general user settings that aim to meet different user roles' needs are configured by an administrator. Different user roles require different settings. For more information, see *F2 Desktop – Administrator manual*.

Click on **User settings** in the "Setup" tab in F2's main window to open the dialogue "User settings".

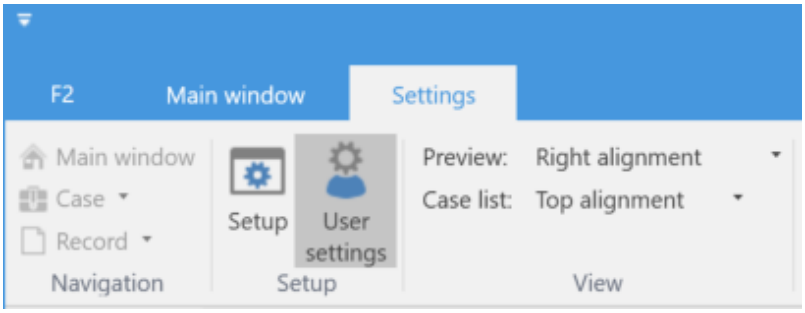

Figure 36: The menu item "User settings"

In the dialogue it is possible to view the user settings created by an administrator. Click on the desired user setting, and the menu item "Use this user setting" will become active as shown below.

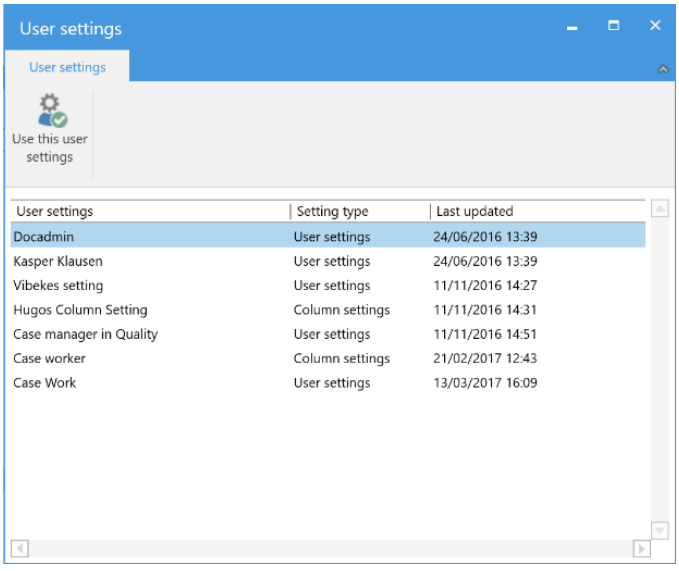

Figure 37: The "User settings" dialogue

Click on **Use this user setting** to overwrite the existing user settings. A green bar will appear in the top of the dialogue with the message "You now use the user settings from [user setting title]" as shown below.

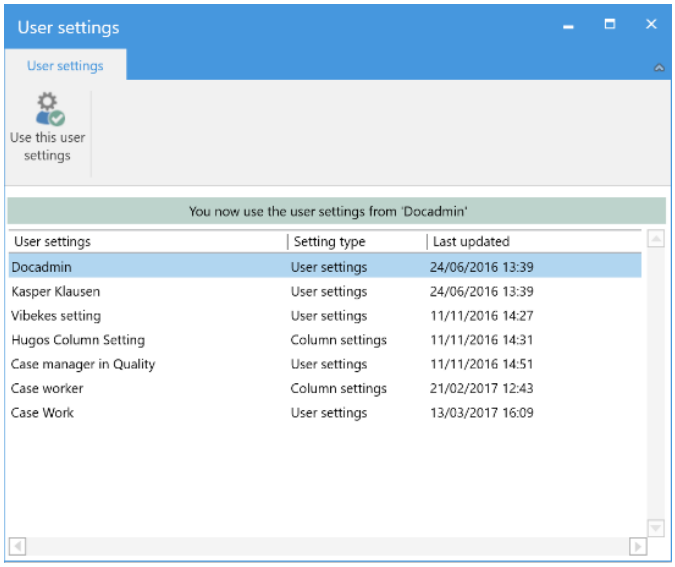

Figure 38: Use this user setting

Note: When new user settings are retrieved, F2 must be restarted for the settings to take effect. The new user settings will overwrite any previous changes to the user settings.

User images

In F2 is it possible to add images for F2 users, units and external participants. The images are displayed on the participant's master record for units, users and external participants. For users of F2 the image is also displayed in the chat window and in the user identification in the upper right corner of the main, record and case windows.

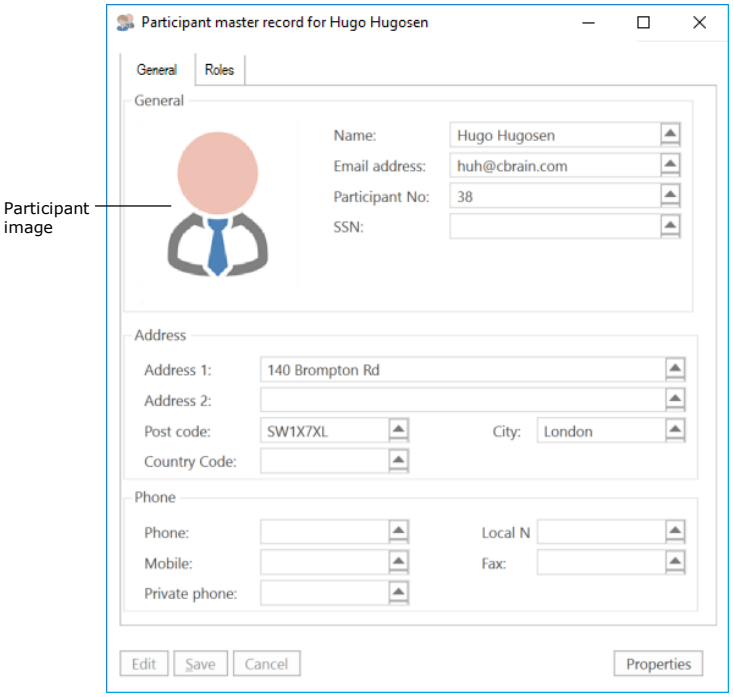

Figure 39: The image on the participant master record

> **Note**: It is only possible to add, change and remove the image of one's own user and for external participants. Adding, changing or removing images for units and other F2 users requires administrator privileges.

Add, change or remove an image

It is possible to add, change and remove images for users, units and external participants in the participant register. To add or change an image, select "Change image" in the right-click menu of the participant in the participant register.

To open the participant register, click on **Contacts** in the navigation bar. Right-click on the wanted participant and select **Change image**. To remove an image, select "Remove image" from the right-click menu.

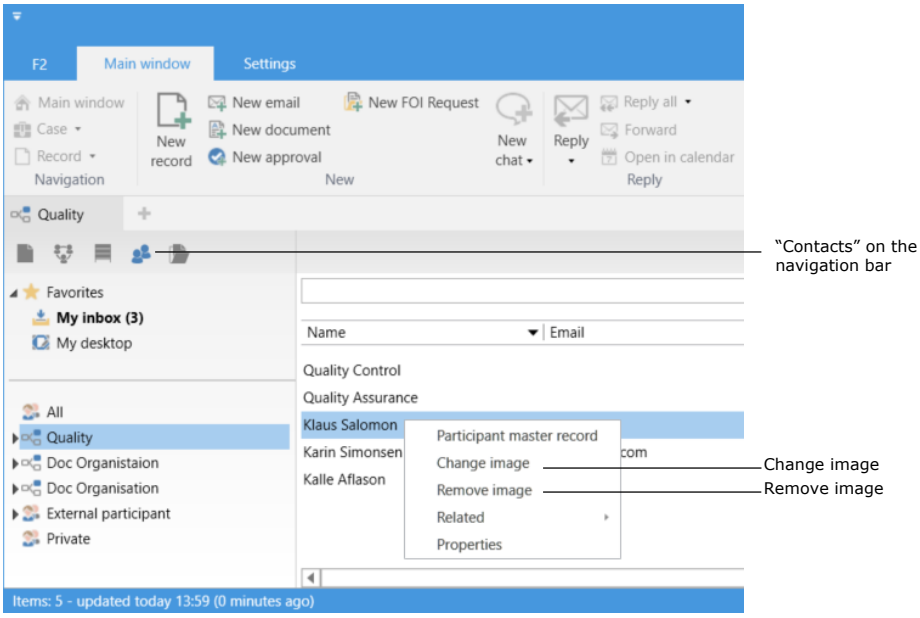

Figure 40: The right-click menu for participants

In the "Change image" dialogue, select an image from either a local or external drive using the **Browse** button. Use the zoom buttons **-** and **+** to adjust the size of the selected image. Then click on **OK**. The image is now either added, possibly replacing an older image.

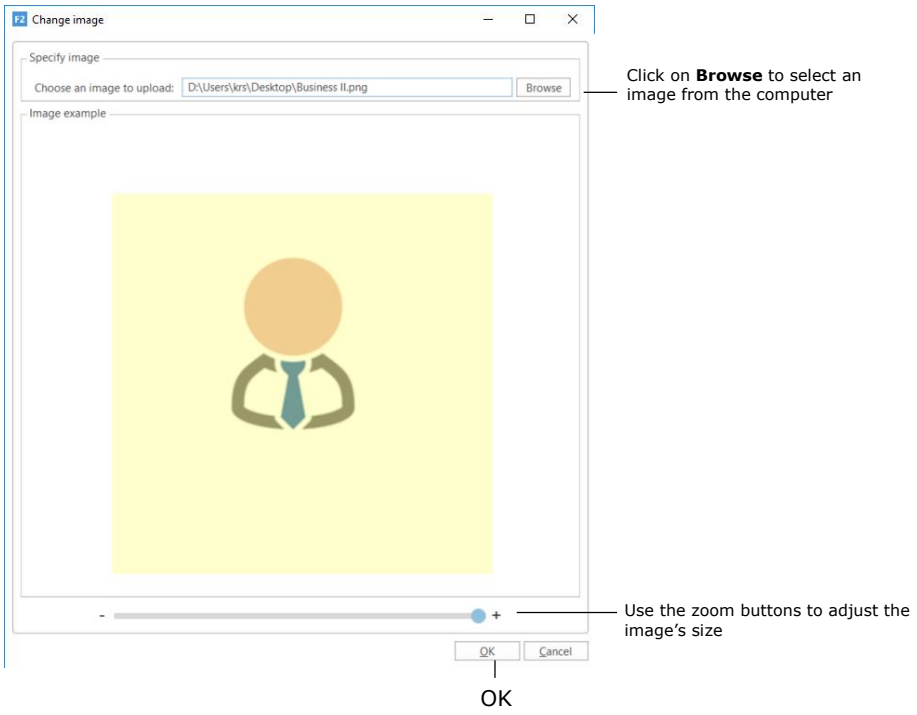

Figure 41: The "Change image" dialogue

F2 users can also change the image using the user identification located in the upper right corner of the main, record and case windows.

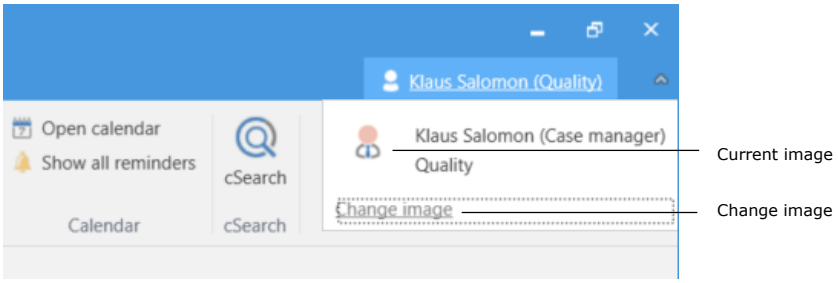

Figure 42: Change the image through the user identification

Setup of the views in F2

On the "Settings" tab it is possible to control the list and folder views in F2. The view can be adjusted for every individual list, search and folder. For more information, see the section *Setting up the results list (column selection, grouping and sorting)*.

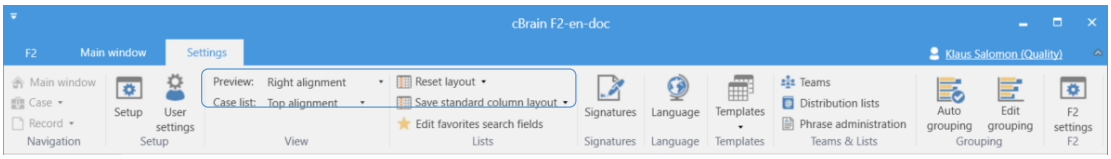

Figure 43: View settings under the "Settings" tab

The menu items "Preview", "Case list", "Reset layout" and "Save standard column layout" are described below.

Function	Purpose
"Preview" 	A preview of a record document or the first few pages of an attachment will be shown in a separate window when the user clicks on a record. The preview is an effective tool to gain an overview of the contents of a specific record. The preview display options are: • "Right alignment" • "Bottom alignment" • "Hidden". Selecting "Hidden" hides the preview. **Note**: For large files, only a limited number of pages will be shown in the preview. When this occurs, F2 will inform the user.
"Case list" 	Choose where to display the case window in the "Show cases" view. The options are "Left alignment", which displays cases to the left and associated records to the right, and "Top alignment", which displays cases above the associated records.
"Reset layout" 	"Reset layout" overwrites the user's current column layout settings. If the user has saved any standard column settings these will be retrieved, otherwise the global default layout settings will be used. "Reset standard column settings" removes the user's saved standard column settings and

Function	Purpose
	replaces them with the global default column settings.
"Save standard column layout" 	This operation overwrites any previously saved standard column settings (for the chosen list, search or folder) and replaces them with the new column settings.

There are three different layout levels for column settings in F2. These are basic, standard and personal column settings.

Function	Purpose
Basic column settings	These settings are delivered with F2 and are non-changeable.
Standard column settings	These settings are configured by an F2 administrator. These are configured when an F2 administrator creates a new non-personal search whose layout F2 then saves as the standard layout.
Personal column settings	These settings are setup by the user him/herself. If a user changes the layout a personal layout is created for the chosen search.

When a saved search is chosen, F2 searches for the personal layout related to that search. If this cannot be found, F2 instead searches for the standard layout for that search. If this cannot be found either, the basis layout is used.

Signatures

Click on the menu item **Signatures** in the "Settings" tab to create or edit a signature.

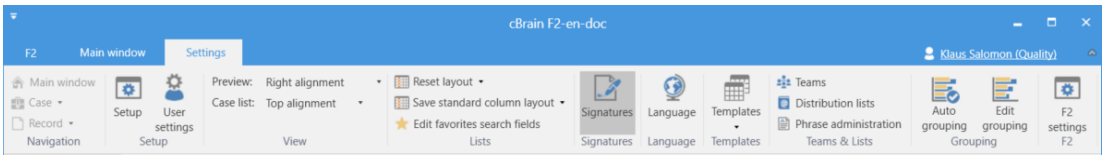

Figure 44: The menu item "Signatures" under the "Settings" tab

There are no limits as to how many signatures a user can have in F2. However, it is only possible to choose one signature to add to a record when it is opened.

Create a new signature

Click on **Signatures** to open a dialogue that provides an overview of the user's signatures.

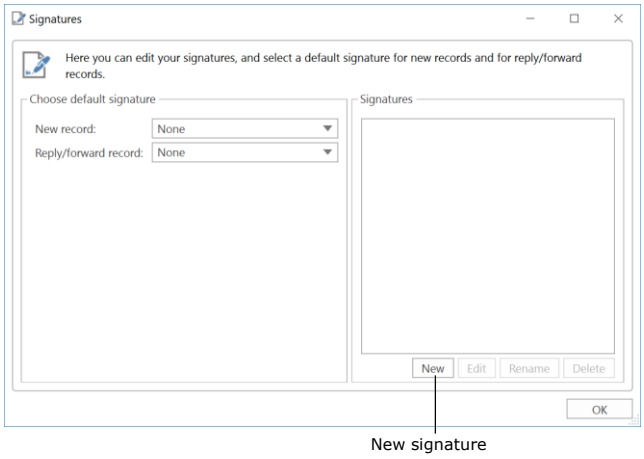

Figure 45: Create signature

Click on **New**. A dialogue, shown below, then opens, and a name for the new signature is entered.

Figure 46: Name the new signature

After entering the name of the new signature, click **OK**. A window then opens in which the user can edit the signature, like shown below. When the signature is finished, click **OK**.

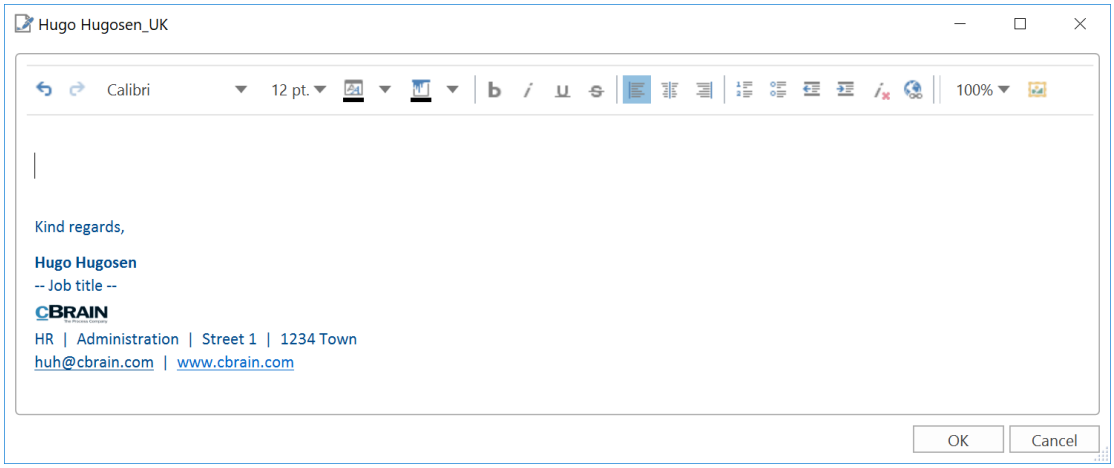

Figure 47: Editing signature

When configuring F2 a system administrator can create a standard signature template that can be used as a reference point as shown above. However, as a rule all users are free to create their own signatures.

Insert signature

A signature can be inserted directly in the record document. To do this, click on **Insert** on the record, and the signature text will be placed in the record document where the cursor is located.

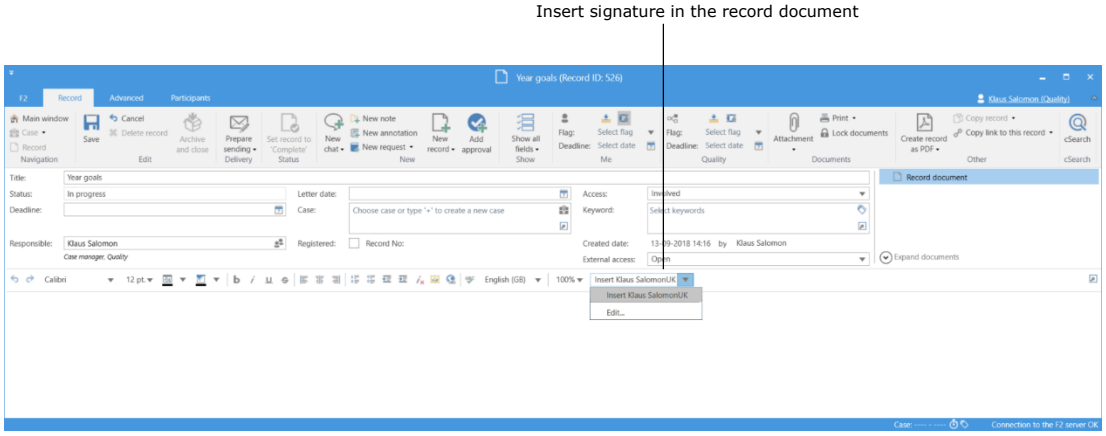

Figure 48: Insert signature

It is possible to configure F2 to insert a signature when a new record is created. This also applies to emails that are replied to or forwarded. Under the menu item "Signatures", choose if F2 should insert the signature chosen as standard for the fields "New record" and "Reply/Forward record" by using the drop-down menu. Both fields are set to "None" by default.

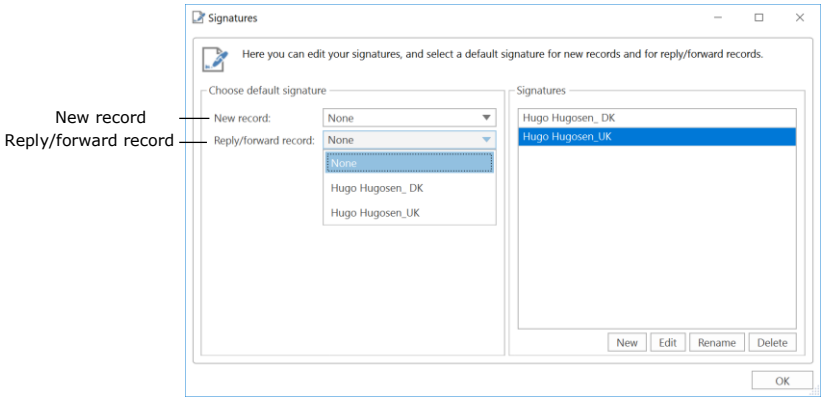

Figure 49: Add signature

Edit existing signatures

An already existing signature can be edited, renamed or deleted.

- To edit an already existing signature, select it and click on **Edit**.
- To rename an already existing signature, select it and click on **Rename**.
- To delete an already existing signature, select it and click on **Delete**.

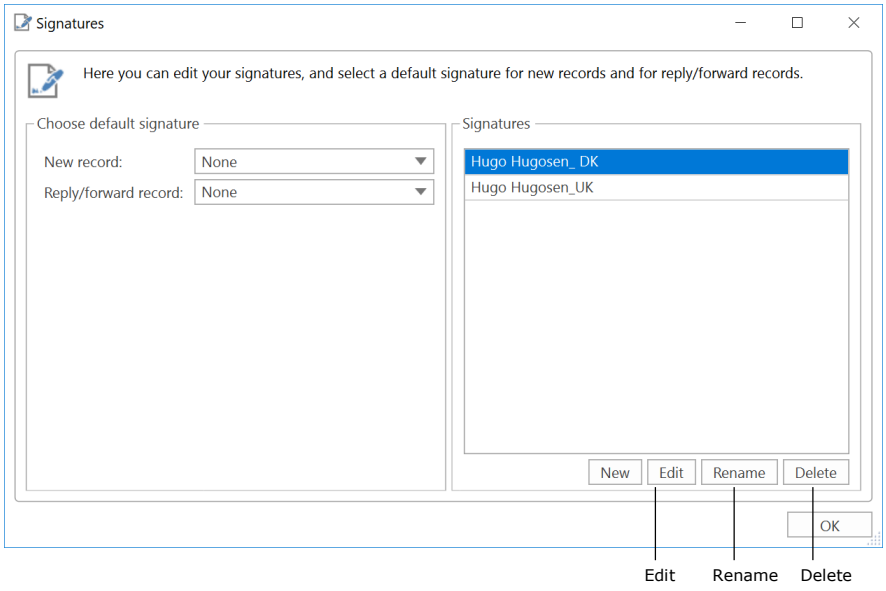

Figure 50: Edit, rename or delete signature

It is possible to add, edit and delete signatures in two ways in F2. Either as shown above using the menu item "Signatures" on the "Settings" tab, or by performing the action directly from a record.

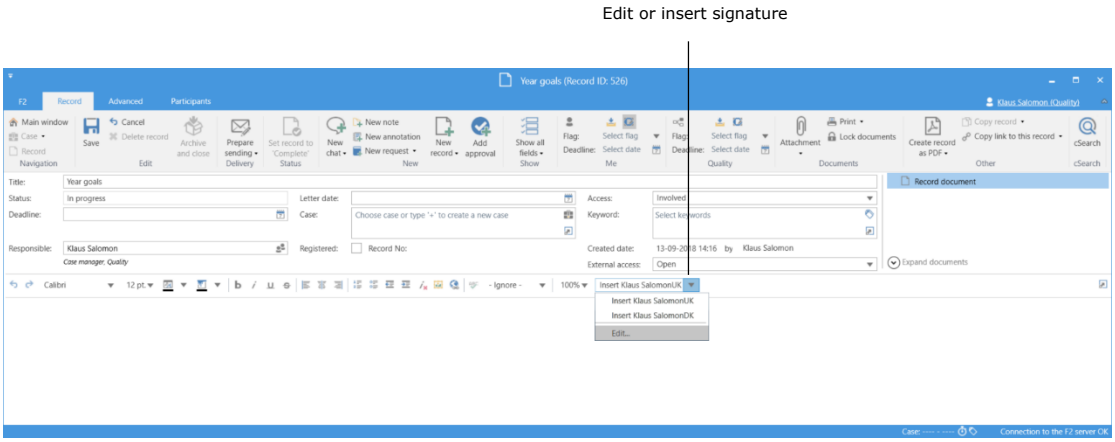

Figure 51: Add, edit or delete a signature in an email

Language

The menu item "Language" is found under the "Settings" tab. Languages other than the customer's primary language are add-on modules.

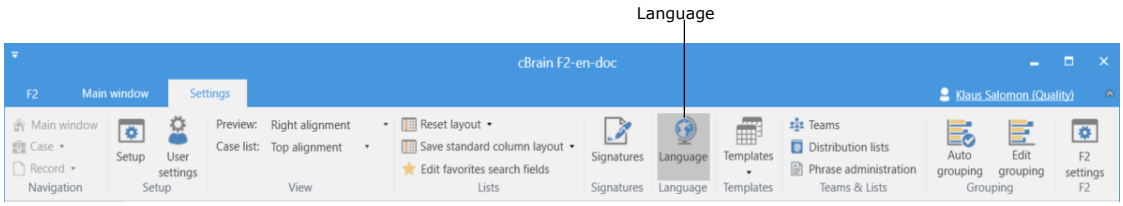

Figure 52: The menu item "Language" under the "Settings" tab

Depending on the languages with which the F2 installation has been configured, it is possible to choose between languages when logging in. Currently it is possible to choose between the following languages: Danish, English and German.

To change the language, click on the menu item **Language** which makes the following dialogue appear.

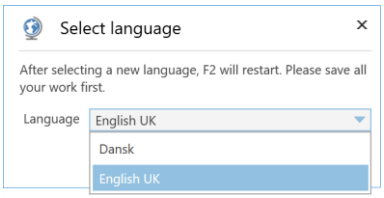

Figure 53: Select language

Note: F2 will restart when a new language has been selected.

Templates

In F2 it is possible to save templates for Office programs. These templates can be used when new documents are created in F2. The menu item "Templates" can be found on the "Settings" tab in the main window.

Using the menu item "Templates" it is possible to administrate document and approval templates for an authority.

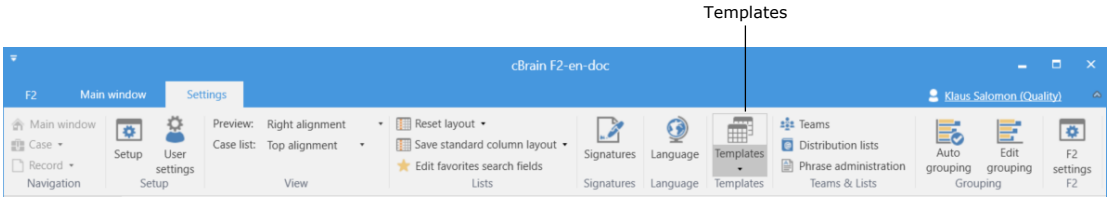

Figure 54: The menu item "Templates" under the "Settings" tab

All users can create private document templates to use for daily work. A document template can be made available for the entire authority or for an individual unit under the authority by a user who either has a business administrator role or who is an F2 administrator.

Depending on the F2 installation, one or two types of templates will appear when clicking on **Templates**:

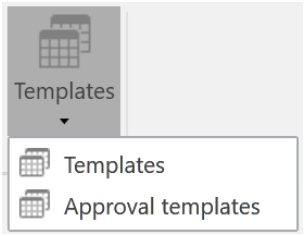

Figure 55: Select templates

In the example above it is possible to choose between templates for either documents or approvals.

The "Templates" dialogue

Click on **Templates** and the dialogue below will appear. Here the authority's and the user's personal templates will be displayed.

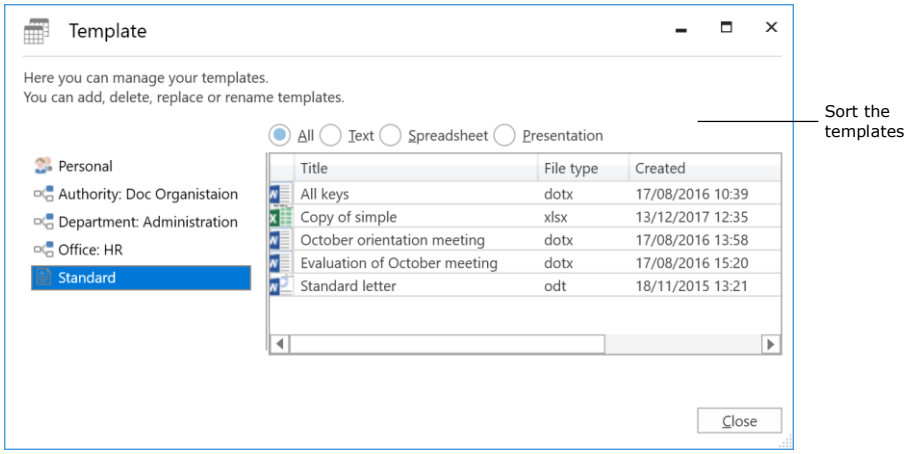

Figure 56: Template maintenance

The document templates can be sorted by the following categories: "All", "Text", "Spreadsheet" or "Presentation".

In the F2 installation depicted above, it is possible to create templates for:

Type	Description
Personal	The user's private document templates.
Authority	Document templates that are accessible for all users in the specific authority.
Department	The department's document templates can be used by all users in the department along with all underlying units.
Office	The office's document templates can be used by all users in an office.

In this dialogue it is possible to create, delete, move and/or rename document templates. Right-click on a unit or folder and the following options appear:

- **Add template** to upload new Office templates.
- **Rename folder** to change the name of an already existing folder.
- **Delete folder** to delete a folder.
- **Create folder** to organise the document templates.

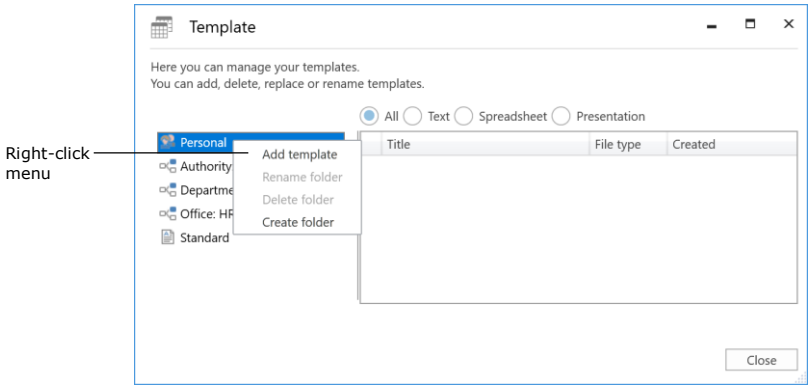

Figure 57: The menu that appears when right-clicking on a unit or folder

Right-click on a document template and the following options will appear:

- **Properties** to correct an existing document template's properties, e.g. its title.
- **Save copy** to download a copy of an existing document template.
- **Replace content** to upload a replacement file for an existing document template.
- **Delete** to remove a document template.

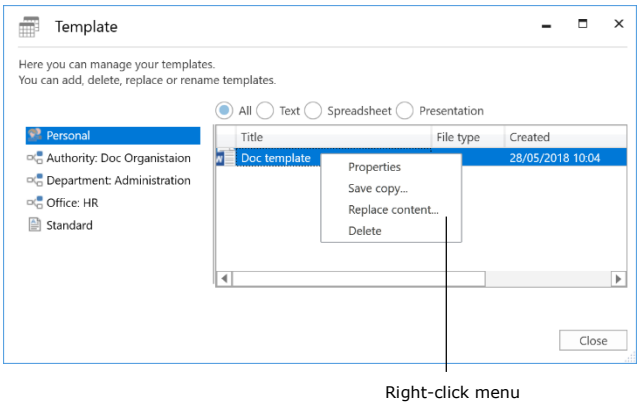

Figure 58: The menu that appears when right-clicking on a template

The menu items of the right-click menu are described below.

Function	Description
"Properties"	Click on **Properties** in the right click menu to open the dialogue "Document properties". Here it is possible to change the title of the document template. It is also possible to view information about the template, e.g. it's the creator of the document on which it is based, the user who saved the template, when it was saved, etc. "Size (KB)" displays the document template's file size. The path for the template is also shown.

Function	Description
"Save copy"	Select "Save copy" to save a copy of the document template file, either locally or on an external drive.
"Replace content"	Select "Replace content" to replace the chosen document template file with a file from an external drive.
"Delete template"	Select "Delete template" to delete the document template. Click on **Yes** in the dialogue to confirm the action.

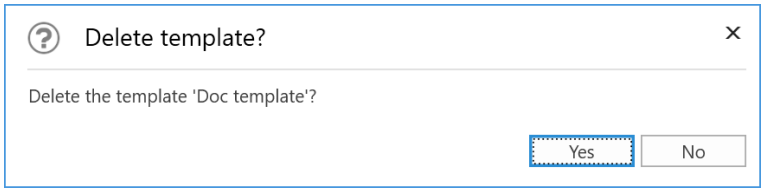

Figure 59: Delete template

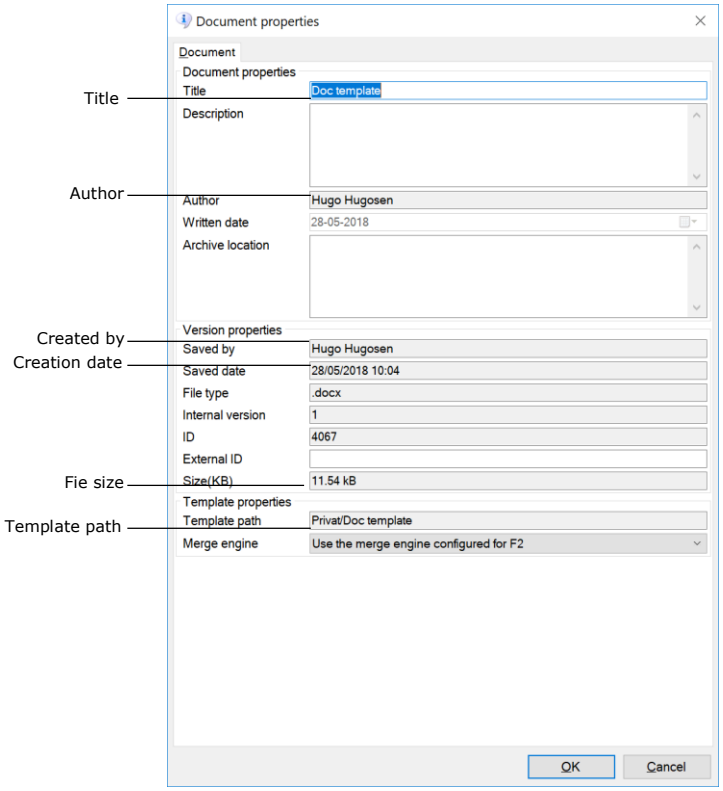

Figure 60: Document properties

Adding a new document template

Document templates for use in F2 must be generated outside F2 and then imported. To do this, right-click on the folder or unit where the document template should be placed and then click on **Add template**.

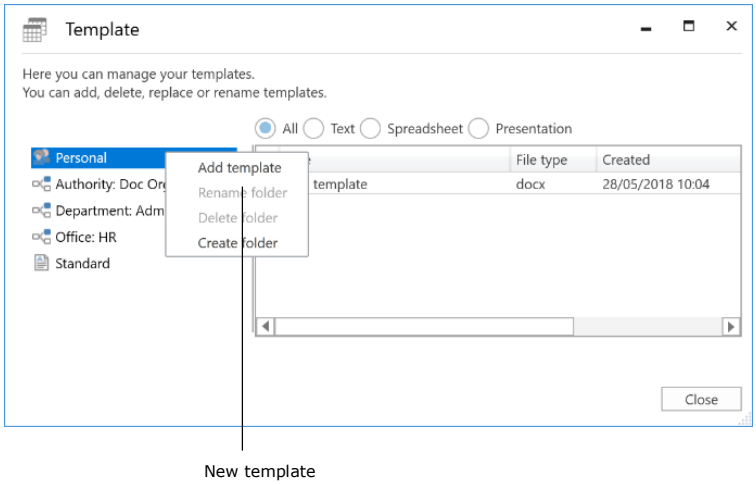

Figure 61: Create new template

Click on **Browse** in the "New template" dialogue to import the chosen document template from an external drive.

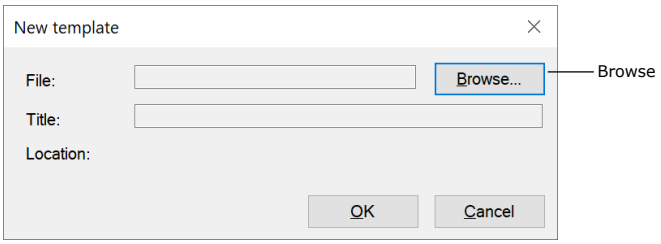

Figure 62: Add new template

Give the document template a title. If the user has permission to establish department or authority templates, it is possible to select a location for the document template.

Approval templates (add-on module)

If a given approval process sequence will be used more than once, it can be saved as an approval template.

There are two types of approval templates:

- **Personal approval templates**: These are created by the user and can only be seen/used by the user him/herself.
- **Shared approval templates**: These are available for the entire authority and/or chosen departments. Shared approval templates are configured by an F2 administrator or a user with the business administrator role. This user also determines who can see and use the approval templates.

Click on **Templates** and then on **Approval templates** to view a list containing the active approval templates.

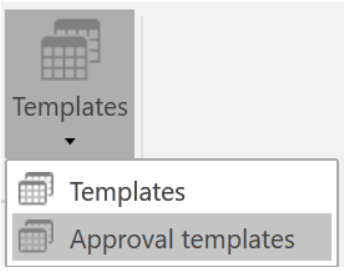

Figure 63: Select approval template

Approval templates are created directly in F2 as opposed to the creation of document templates. For more information on creating approval templates please see *F2 Approvals – User manual*.

Distribution lists

All users can create personal distribution lists. However, only users who have a role with the privilege distribution lists editor can create and manage the joint distribution lists in F2.

It is possible to add other units and users (also from other F2 authorities) along with external participants to a distribution list. This allows for a list that contains a mix of participants from the user's own authority and participants from other authorities, units and external participants.

It is also possible to add a distribution list to another distribution list along with units, external participants and individual users. This makes updating distribution lists easier as distribution lists that contain the original list will automatically be updated, when the original list is updated.

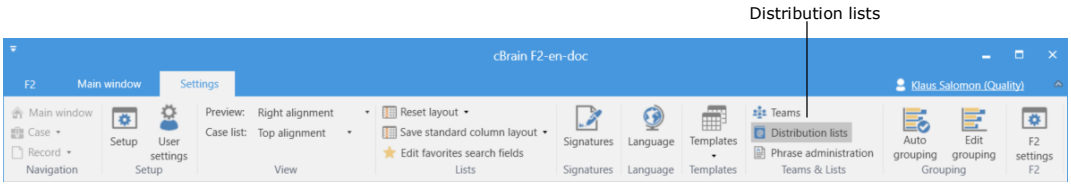

Figure 64: The menu item "Distribution lists" under the "Settings" tab

The menu item "Distribution lists" opens the window described below.

The "Distribution lists" window

It is possible to create new distribution lists and manage existing ones in the "Distribution lists" window. The distribution lists can be sorted using the following columns: "Name", "Last updated", "Created" and "Visibility".

The "Visibility" column indicates whether a distribution list is private or shared. A private list is given the visibility value "Me", while a shared distribution list is given the visibility value "Everyone".

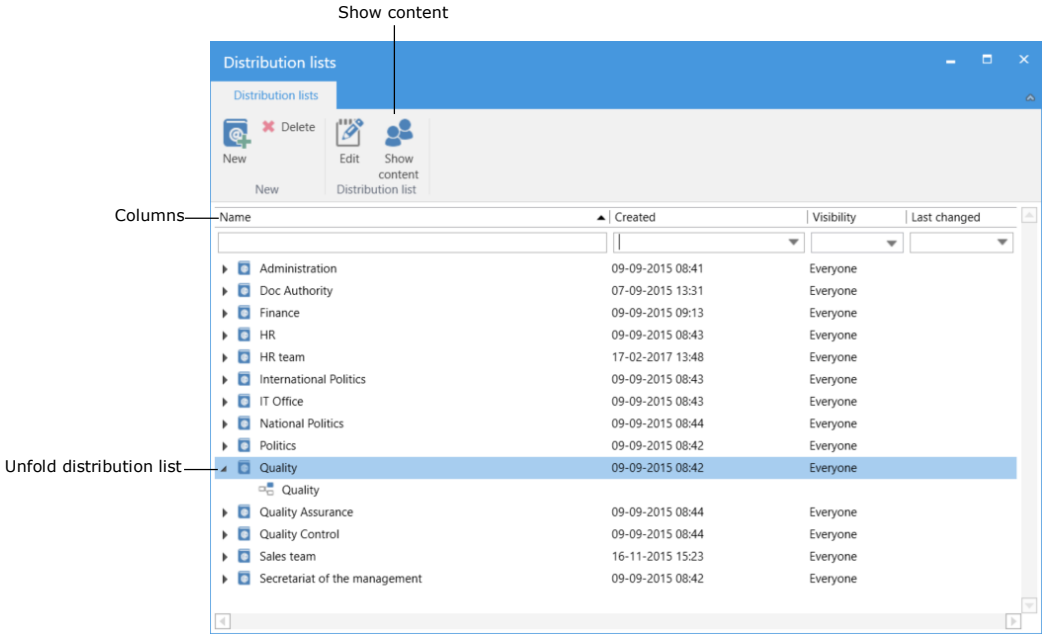

Figure 65: The "Distribution lists" window

The distribution list's content is displayed by expanding the node. For a more detailed overview of a distribution list, select a list and click on **Show content** in the ribbon. This opens the dialogue "Show content: [Distribution list]" that shows the content of the distribution list at the time of opening.

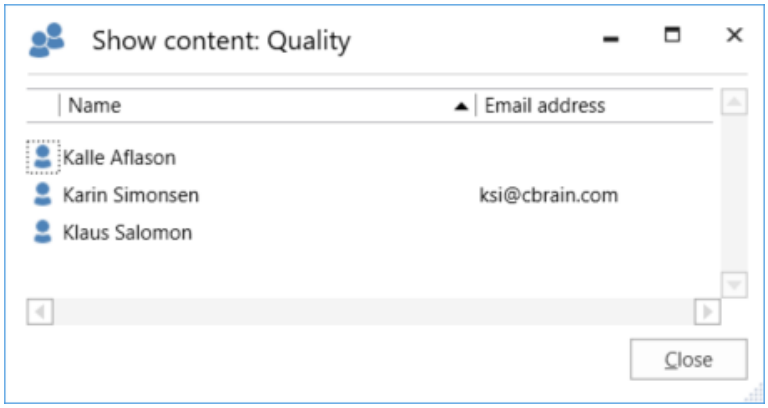

Figure 66: The dialogue "Show content: [Distribution list]"

Create a distribution list

To create a new distribution list, click on **New** in the "Distribution lists" window.

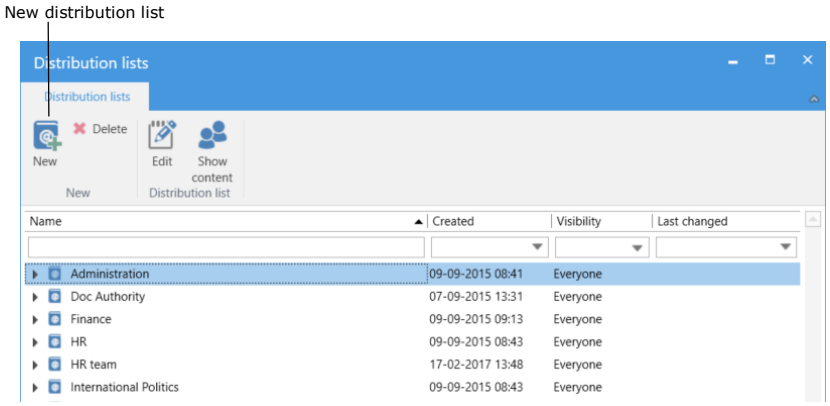

Figure 67: Create a new distribution list

The dialogue "New distribution list" opens. Give the distribution list a name and select the list's visibility using the "Who can see the list?" dropdown menu. Select "Me" for a private list, and "Everyone" to create a shared list.

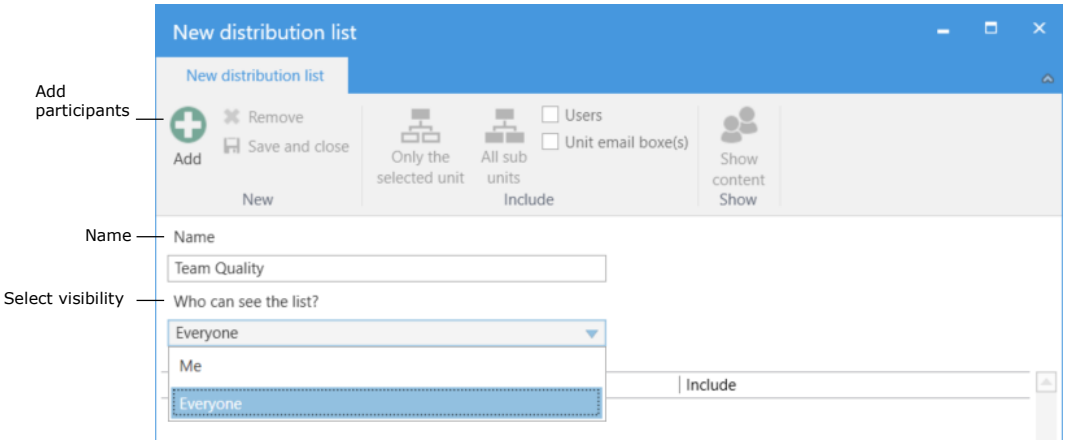

Figure 68: The "New distribution list" dialogue

Click on **Add** to select units and/or users (participants) to add to the distribution list.

Select the participants for the distribution list in the "Select participants" dialogue. Add a participant by either double-clicking on the participant or select the participant and click on **Add participant(s)**.

It is also possible to perform an advanced search for participants by clicking on **Advanced search**. For more information on advanced searches, see the submanual *F2 Desktop – Search functions*.

When the desired participants have been added to the list, click on **OK**.

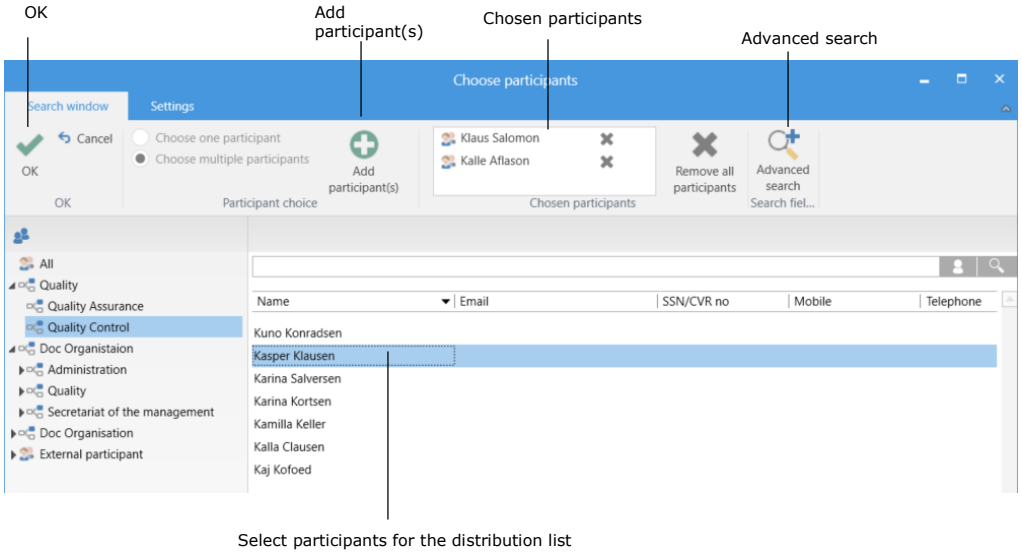

Figure 69: Selecting participants for a distribution list

Click on **OK** in the above dialogue to return to the "New distribution list" dialogue. Here the user can add users and/or units on hierarchical sublevels to the list by using the functions of the menu group "Include", shown below.

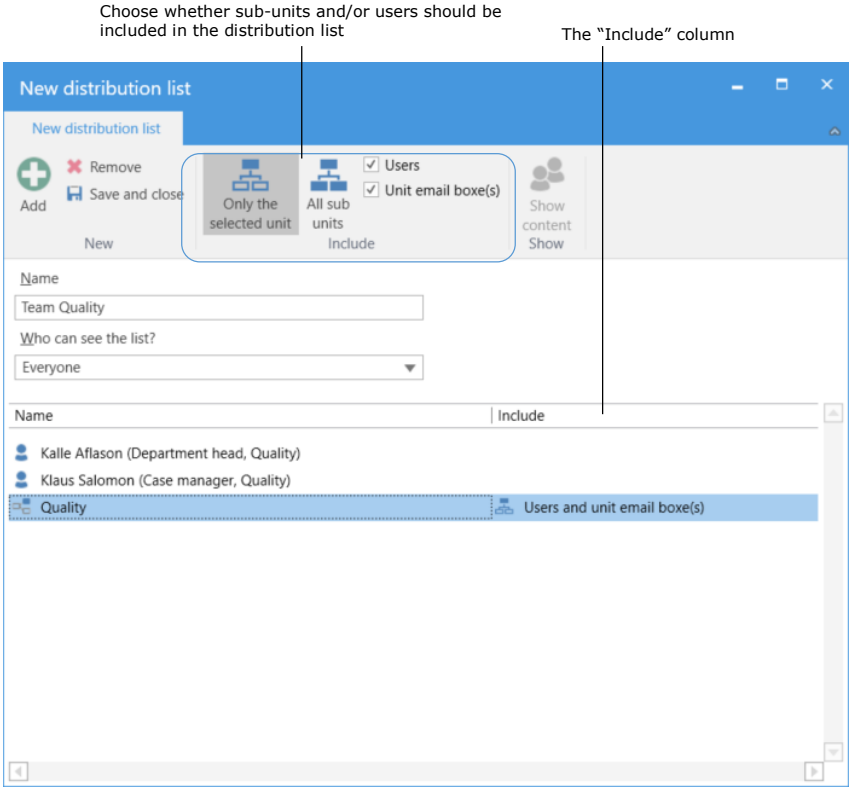

Figure 70: Include units and users from the selected units

Click on **Save and close** when the editing of the distribution list is finished. The distribution list is then created.

Note: Distribution lists must be given a unique name. It is not possible to create two private or two shared distribution lists with the same name.

Note: It is not possible to change a distribution list's visibility after it is created.

Private distribution lists

A user who does not have the distribution list editor privilege can only create new distribution lists with the visibility "Me". A shared distribution list must have the visibility value "Everyone".

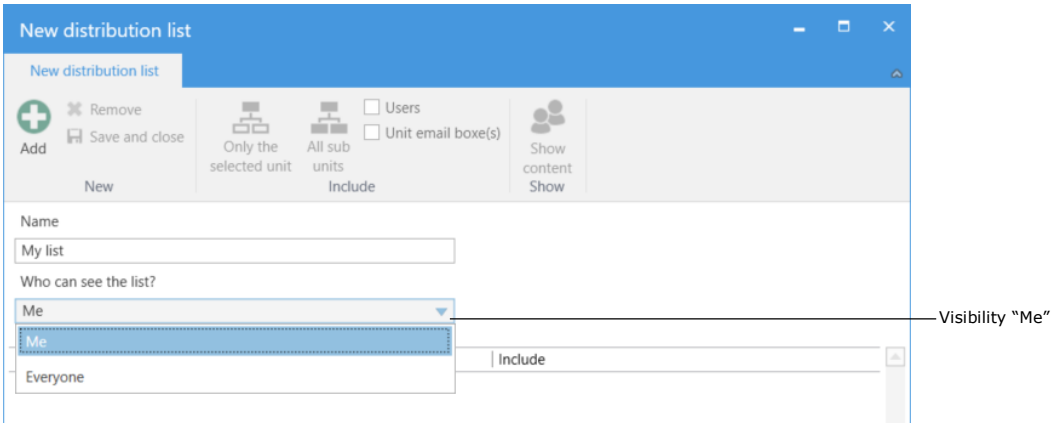

Figure 71: Create a private distribution list

Edit and delete distribution lists

Distribution lists created by the user can be edited and/or deleted. This is done by selecting a list in the "Distribution lists" window and clicking on either **Edit** or **Delete**.

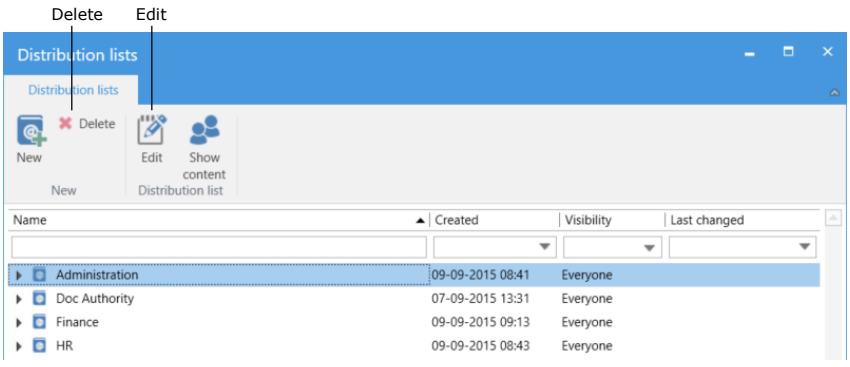

Figure 72: Edit or delete a distribution list

Click on **Edit** to open the "Edit distribution list" dialogue. Here it is possible to add and/or remove participants by clicking on **Add** or **Remove**.

Click on **Save and close** when the editing is finished.

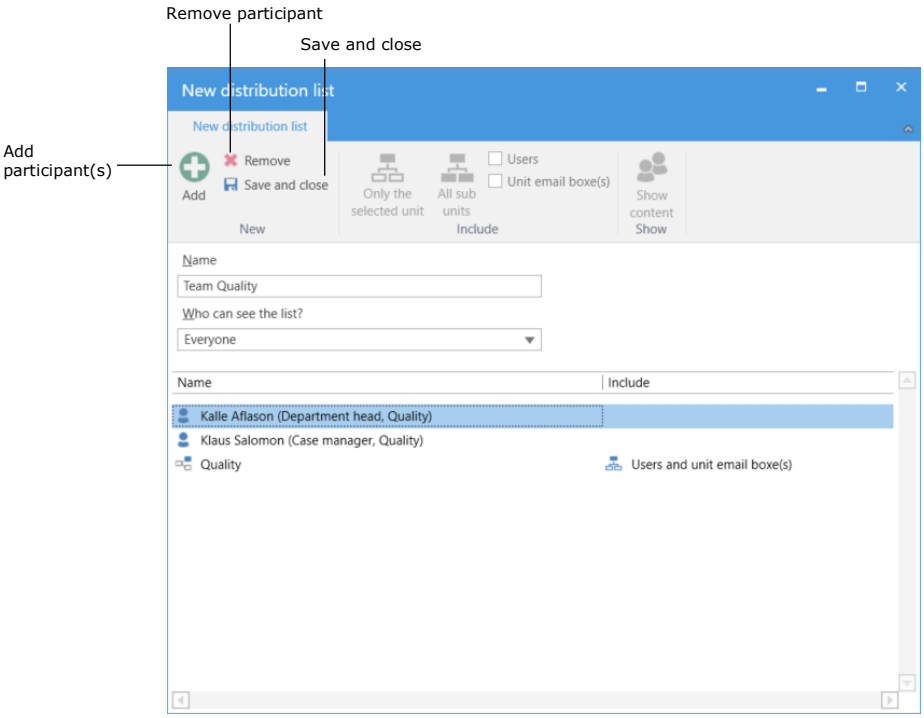

Figure 73: Edit distribution list

To delete a list, click on **Delete** in the "Distribution lists" window to open the dialogue shown below. Click on **OK** to delete the selected distribution list. Click on **Cancel** to cancel the action and keep the distribution list.

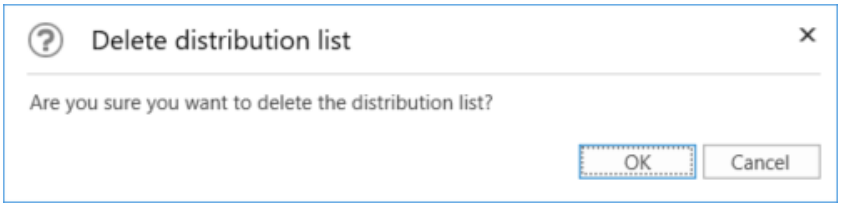

Figure 74: Delete distribution list

Setting up the results list (column selection, grouping and sorting)

The results list can be personalised. As with all column views in F2, it is possible to adjust the width and placement of the columns in the results list.

To change the order of columns, simply drag and drop the columns so they appear in the wanted order. The width of a column can be adjusted by pulling it until it has the desired width. An overview of columns and their use can be found in the section *Columns – Selecting metadata fields in the result* list.

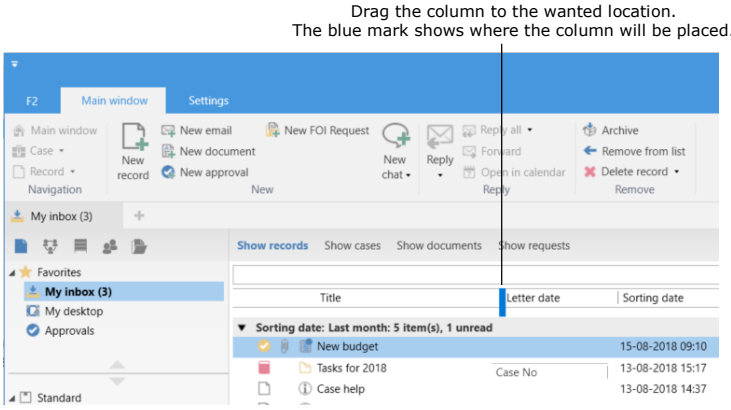

Figure 75: Moving columns in the results list

To sort the results list, click on a column title and the list will be sorted according to the column's values. If the results list is sorted by title, it will appear in alphabetical order (either a-z or z-a). If the results list is sorted by letter date, it can be sorted in numerical order (either 0-9 or 9-0).

Tip: The results list can be sorted further by holding Shift and then clicking on a second column. For example, first sort the results list by "Responsible", then hold Shift and click on the "Title" column. The list items will then be sorted by each "Resonsible" as shown below.

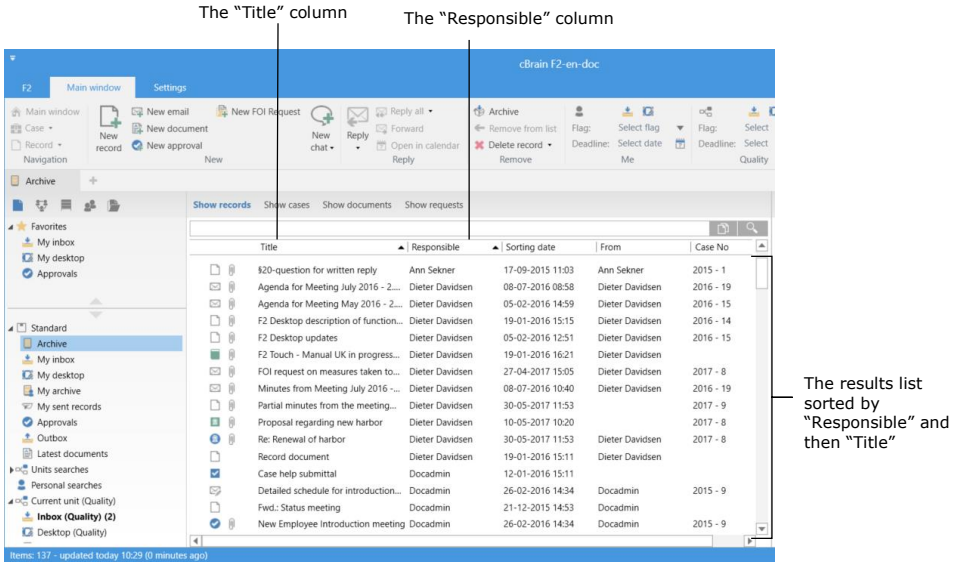

Figure 76: Sorting the columns in the results list

Columns – Selecting metadata fields in the result list

A user can select which metadata fields to display as columns in the results list. Right-click on a column, and then click on **Columns** in the right-click menu that appears. The column selector will open.

The number of columns may vary from installation to installation. Some of the columns described here only appear if the installation contains one or more add-on modules.

The list view – whether it is showing records, cases, documents or requests – determines which columns can be selected.

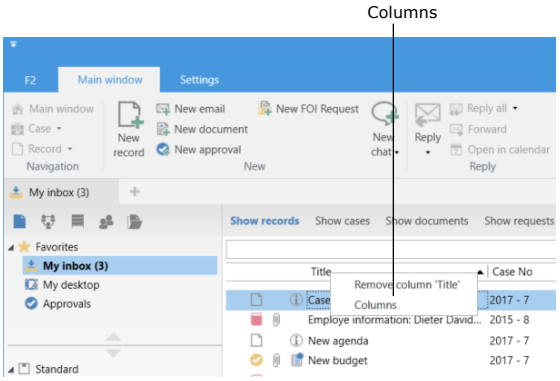

Figure 77: Open the column selector

The figure below shows the column selector. This dialogue provides an overview of all the columns that can be selected. It is possible to search for a column title by using the search field.

By default, all column titles are shown in the dialogue. Tick the box "Show only selected columns" to display the selected columns only.

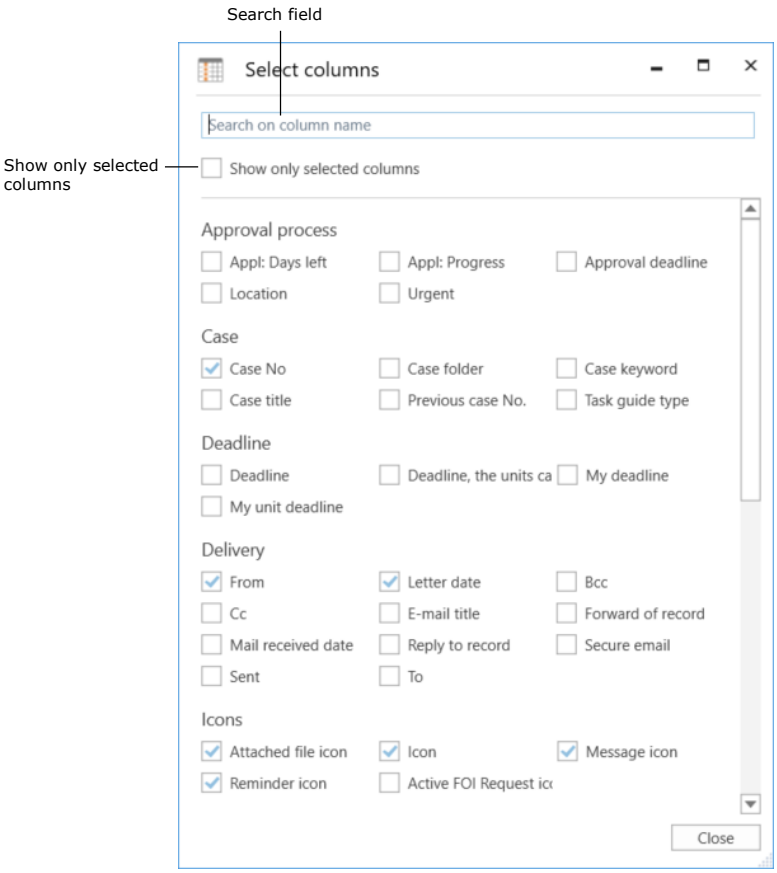

Figure 78: The column selector

Select or deselect a column by ticking or unticking the box next to its title.

> **Note**: If all columns are removed by mistake, right-click on the blank column bar to access the column selector.

All permanent lists, including personal lists, have their own layout. If the user changes a layout, it is only changed for the chosen list.

A complete list of all the columns and their purposes can be found in the submanual *F2 Desktop – Search functions*.

List of Figures

Figure 1: The "Settings" tab 6
Figure 2: "Setup" under "Settings" 6
Figure 3: Setup – "General" 7
Figure 4: The dialogue "Archive and close" 8
Figure 5: The "Move to folder" dialogue 9
Figure 6: The "Close cBrain F2?" dialogue 10
Figure 7: Setup for the "Main window" 11
Figure 8: Setup for "Cases" 12
Figure 9: Setup for "Records" 13
Figure 10: Select language 14
Figure 11: The "Cancel changes?" dialogue 14
Figure 12: Select the auto save interval 15
Figure 13: The "Copy record to several cases" dialogue 15
Figure 14: "Send secure" as a default setting 16
Figure 15: The "Metadata assistant" dialogue 17
Figure 16: The "Save external participants" dialogue 17
Figure 17: "Create participants" 17
Figure 18: The "Leave document versions?" dialogue 18
Figure 19: Setup for "Record view" 18
Figure 20: Setup for "Documents" 19
Figure 21: Select the opening state for documents 19
Figure 22: The "Open document" dialogue 20
Figure 23: Setup for "Chat" 20
Figure 24: Setup for "User" 21
Figure 25: The "Please choose user role" dialogue 22
Figure 26: Login using "Single sign-on" 22

Figure 27: Select standard approval template 22
Figure 28: Example of an icon with high contrast 23
Figure 29: Help notification 23
Figure 30: Setup for "Task guides" 24
Figure 31: Setup for "Out of office" 25
Figure 32: Out of office in chat 26
Figure 33: Setup for "On behalf of me" 27
Figure 34: The "On behalf of" overview 27
Figure 35: Assign "on behalf of" privileges 28
Figure 36: The menu item "User settings" 29
Figure 37: The "User settings" dialogue 29
Figure 38: Use this user setting 30
Figure 39: The image on the participant master record 31
Figure 40: The right-click menu for participants 32
Figure 41: The "Change image" dialogue 32
Figure 42: Change the image through the user identification 33
Figure 43: View settings under the "Settings" tab 34
Figure 44: The menu item "Signatures" under the "Settings" tab 36
Figure 45: Create signature 36
Figure 46: Name the new signature 36
Figure 47: Editing signature 37
Figure 48: Insert signature 37
Figure 49: Add signature 38
Figure 50: Edit, rename or delete signature 38
Figure 51: Add, edit or delete a signature in an email 39
Figure 52: The menu item "Language" under the "Settings" tab 40
Figure 53: Select language 40
Figure 54: The menu item "Templates" under the "Settings" tab 41

Figure 55: Select templates 41
Figure 56: Template maintenance 42
Figure 57: The menu that appears when right-clicking on a unit or folder 43
Figure 58: The menu that appears when right-clicking on a template 43
Figure 59: Delete template 44
Figure 60: Document properties 44
Figure 61: Create new template 45
Figure 62: Add new template 45
Figure 63: Select approval template 46
Figure 64: The menu item “Distribution lists” under the “Settings” tab 47
Figure 65: The "Distribution lists" window 48
Figure 66: The dialogue "Show content: [Distribution list]” 48
Figure 67: Create a new distribution list 49
Figure 68: The “New distribution list” dialogue 49
Figure 69: Selecting participants for a distribution list 50
Figure 70: Include units and users from the selected units 50
Figure 71: Create a private distribution list 51
Figure 72: Edit or delete a distribution list 51
Figure 73: Edit distribution list 52
Figure 74: Delete distribution list 52
Figure 75: Moving columns in the results list 53
Figure 76: Sorting the columns in the results list 54
Figure 77: Open the column selector 54
Figure 78: The column selector 55